


ENERGIZER 123

Photo



Industry Standard Dimensions

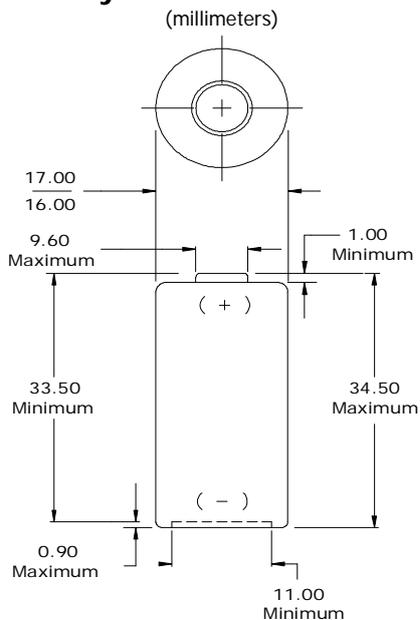

This battery contains a Positive Temperature Coefficient (PTC) safety device to limit current during short circuit conditions.

Simulated Application Tests



Typical Use Performance

Type (time)	Drain (mA)	Load (ohms)	Cutoff Voltage		
			2.0V (21°C) (hours)	1.8V (21°C) (pulses)	1.55V (21°C) (pulses)
Capacity (continuous)	---	100	58	---	---
Photoflash (3 / 27 sec)	900	---	---	---	2000
Photoflash (3 / 7 sec)	1200	---	---	1370	---
Photoflash (3 / 7 sec)	1800	---	---	860	---

Specifications

Classification: "Lithium Photo"
Chemical System: Lithium / Manganese Dioxide (Li/MnO₂)
Designation: IEC-CR17345
Nominal Voltage: 3.0 Volts
Storage Temp: -40°C to 60°C
Operating Temp: -40°C to 60°C
Typical Capacity: 1500 mAh (to 2.0 volts) (rated at 100 ohms at 21°C)
Typical Weight: 17 grams
Typical Volume: 7.0 cubic centimeters
Max Discharge: 1500 mA continuous (3500 mA pulse)
Max Rev Charge: 2 μ A
Typical Li Content: 0.55 grams
Shipping: For complete details, please reference: Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations

Typical Discharge Characteristics

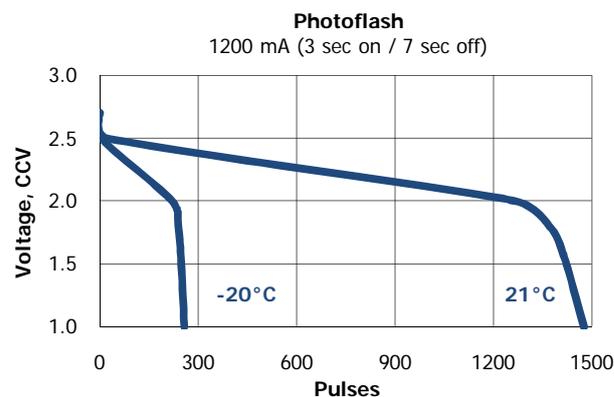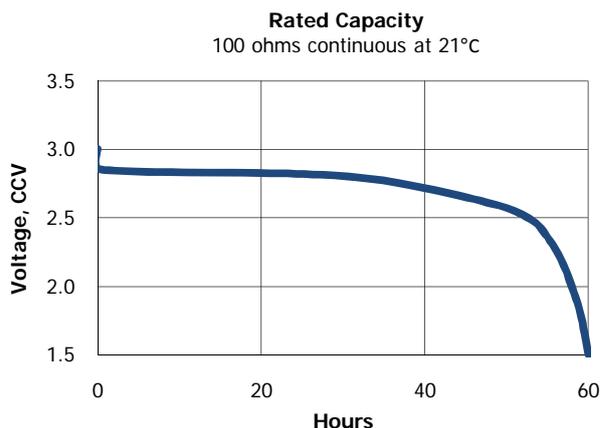

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty