

## Tech specs

EN54 LINE

# EN54 FireProtect (Sounder) Jeweller

Wireless addressable fire alarm sounder



Device compatibility

Check

---

## Communication

## Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced sabotage protection.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

Learn more 

### Frequency bands

866.0 – 866.5 MHz

868.0 – 868.6 MHz

868.7 – 869.2 MHz

905.0 – 926.5 MHz

915.85 – 926.5 MHz

921.0 – 922.0 MHz

Depends on the sales region.

### Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and radio interference.

### Radio signal modulation

GFSK

### Radio communication range

up to 1,700 m

Between the device and control and indicating equipment (CIE) or a range extender in an open space.

**Calculate radio communication range at the facility** ➤

## **Encrypted communication**

All stored and transmitted data is protected by block encryption featuring a dynamic key.

## **Frequency hopping**

To prevent radio interference and jamming.

**Learn more** ➤

---

## **Alarm annunciation**

### **Alarm type**

acoustic

### **Sound volume**

up to 100 dB at a distance of 1 m

Adjusted by a PRO or user with admin rights in an Ajax app.

### **Sound pattern**

32 tones

## Sound synchronization

An audible alarm is automatically synchronized on all devices with a sounder connected to the same CIE.

## Alarm annunciation test

An audible alarm check to ensure the fire alarm is clearly audible on the premises.

### Installation recommendations

Follow your local fire safety regulations when selecting the device's installation site.

The device is designed for outdoor and indoor use.

---

## Sabotage protection

### Tamper button


Fault notification when an attempt is made to remove the device from the mounting panel.

Learn more 

## Lock for SmartBracket

to secure the device on the  
SmartBracket mounting panel

When locked, the lock secures the device  
and prevents it from being removed  
without a special tool.

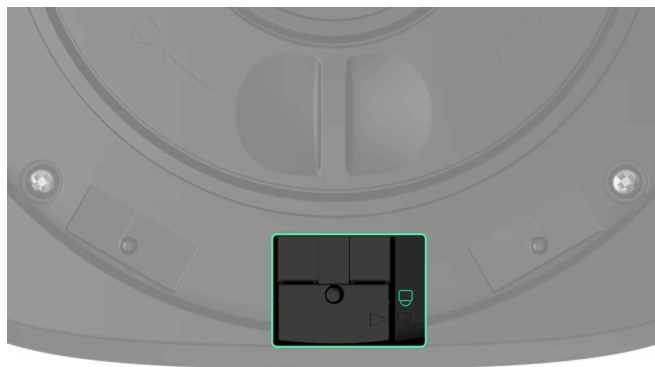

## Protection against spoofing

device authentication

## Connection loss detection

after 36 s

Detection time depends on **Jeweller**  
settings.

---

## Power supply

### Battery

4 × CR123A

Pre-installed.

## Tool-free battery replacement

To replace the batteries, turn the battery compartment cover counterclockwise.



## Reverse polarity protection

Prevents device damage if the batteries are put in incorrectly.

## Recommended battery type

Huiderui CR123A; 3 V; 1,600 mAh,  
LiMnO<sub>2</sub>

## Calculated battery life

up to 5 years

---

## Enclosure

### Dimensions

145 × 145 × 51 mm

### Weight

527 g



## Operating temperature range

from  $-10\text{ }^{\circ}\text{C}$  to  $+50\text{ }^{\circ}\text{C}$

## Operating humidity

up to 80%

## Protection class

IP54

## Flammability rating

UL 94 V-0



51 mm

---

## Color

Black



White



Red



---

## Complete set

EN54 FireProtect (Sunder) Jeweller

4 × CR123A battery (pre-installed)

SmartBracket mounting panel

Installation kit

Quick start guide

---

## Revision

1

## Certification and compliance with standards



EN54 FireProtect (Sunder) Jeweller





## Additional information

### Compliance with standards

Learn more >

### User manual

Learn more >

### Warranty

24 months

Learn more >

## Subscribe

Subscribe to our emails about secure life. No spam.


Subscribe

## Request extra help

✉ support@ajax.systems

🗉 @AjaxSystemsSupport\_Bot

💬 Send a request



Rating 4.7

4,000,000

people worldwide under Ajax protection

💡 Suggest a feature



## Products

Intrusion protection

Video surveillance

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Fibra wired protocol

Ajax radio protocols

## Solutions

Customer stories

Solutions by facility type

Commercial fire detection and alarm system

Upgrades and retrofits

Why Ajax

How it works

## Company

Blog

About us

## Software

For users

Ajax PRO: Tool for Engineers

Ajax Desktop

Ajax PRO Desktop

Ajax Translator PRO

Ajax Cloud Signaling

Scenarios



Available on  
**App Store**



Available on  
**Google Play**

## Support

Manuals and articles

Compliance with standards

## Tools

Ajax device compatibility

Video storage calculator

Video device calculator

Battery life calculator

Radio communication range calculator

Switches and outlets configurator

Fibra power supply calculator

All web tools

## Connecting to CMS

Intrusion alarm monitoring

Video monitoring and visual alarm verification

Audio alarm verification

## For partners

For partners

Ajax Academy

[Press page](#)

[Partner Portal](#)

[Events](#)

[Career](#)

[Ajax Next](#)

[Students at CES 2026](#)

[Reviews and feedback](#)

[!\[\]\(e474458956c9a37fbf9586ddb60a7fa1\_img.jpg\) România](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)

[Anti-Spam Policy](#) [End user agreement](#) [Warranty](#)

© 2025 AJAX SYSTEMS CH. All rights reserved