

Tech specs

EN54 LINE

EN54 Fire ReX Jeweller

Wireless addressable radio signal range extender for a fire alarm system, supporting intrusion protection devices



Device compatibility

Check

Connection possibilities

Number of EN54 Fire ReX Jeweller connected to the CIE

up to 5

Number of devices connected to EN54 Fire ReX Jeweller

up to 199

Wireless communication

Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced sabotage protection.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

[Learn more](#) >

Frequency bands

866.0 – 866.5 MHz

868.0 – 868.6 MHz

868.7 – 869.2 MHz

905.0 – 926.5 MHz

915.85 – 926.5 MHz

921.0 – 922.0 MHz

Depends on the sales region.

Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and radio interference.

Radio signal modulation

GFSK

Radio communication range

up to 1,800 m

Between the CIE and connected devices (in an open space). Maximum range depends on the connected device.

[Learn more >](#)

Encrypted communication

All stored and transmitted data are protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

[Learn more >](#)

Wings communication technology

Proprietary wireless communication technology to transmit photo verifications and update firmware.

Key features:

- Two-way communication.
- Advanced sabotage protection.

- Block encryption featuring a dynamic key.
- Data packet reload in case of transmission errors.
- Photo delivery check.

Frequency bands

866.0 – 866.5 MHz

868.0 – 868.6 MHz

868.7 – 869.2 MHz

905.0 – 926.5 MHz

915.85 – 926.5 MHz

921.0 – 922.0 MHz

Depends on the sales region.

Radio communication range

up to 1,800 m

Between the CIE and a radio signal range extender, or between a range extender and connected devices (in an open space). Maximum range depends on the connected device.

[Learn more >](#)

Encrypted communication

All stored and transmitted data is protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.


[Learn more >](#)

Communication channels

Ethernet

1 8P8C socket

Up to 100 Mbps.

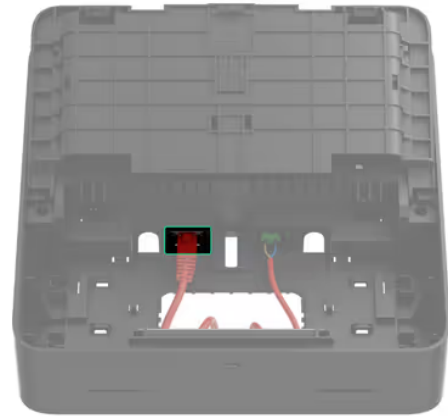

Delivery time

Alarm delivery time to the CIE

0.3 s

Photo delivery time to the CIE

18 s

Via EN54 Fire ReX Jeweller using the Wings channel. Delivery time depends on the settings.

10 s

Via EN54 Fire ReX Jeweller using the Ethernet channel. Delivery time depends on the settings.

[Learn more](#) >

Additional features


LED indication

green

For power supply status.

yellow

For device faults.

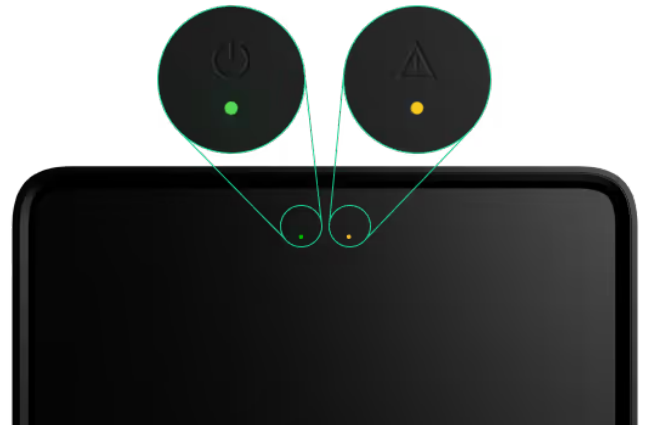

Special tool (key)

The special tool is used to remove the front panel from the range extender.



Installation recommendations

The device is designed for indoor use only.

The device operating voltage is 110–240 V~.

Sabotage protection

Tamper buttons

2

Notifications about the fault on attempts to detach the device from the surface or remove the mounting panel.

[Learn more >](#)

Protection against spoofing

device authentication

Connection loss detection

after 36 s

Detection time depends on **Jeweller** settings.

Power supply

External

100–240 V, 50/60 Hz

Up to 0.48 A of mains power consumption.

Internal

7.4 V_≡, 5 Ah/10 Ah

On a rechargeable Li-ion battery (not included in the complete set): EN54 Internal Battery (24h) or EN54 Internal Battery (72h).

[Learn more](#) >

Quiescent device's current consumption at nominal voltage

80 mA

Maximum device's current consumption at nominal voltage

105 mA

Low battery voltage

6 V_{min}

Low battery recovery voltage

6.2 V_{min}

End-of-life battery voltage

6 V_{min}

Device is switched off.

Minimum energy level for a backup battery in the charged state

8 V_{min}

Autonomous operation

On internal battery

up to 50 hours

When Ethernet is enabled. On EN54 Internal Battery (24h) not included in the complete set.

up to 100 hours

When Ethernet is enabled. On EN54 Internal Battery (72h) not included in the complete set.

[Learn more](#) >


Enclosure

Dimensions

210 × 210 × 51 mm

Weight

890 g

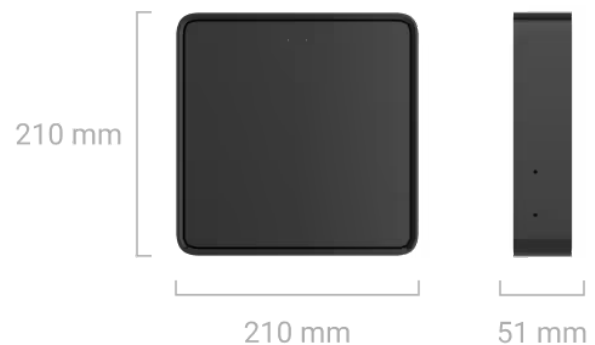

Operating temperature range

from -10 °C to +40 °C

Operating humidity

up to 75% non-condensing

Protection class

IP20

Flammability rating

UL 94 V-0

Colors

Black



White



Complete set

EN54 Fire ReX Jeweller

SmartBracket mounting panel

Installation kit

Ethernet cable

Special tool (key)

Quick start guide

Revision

3

Certification and compliance with standards



EN54 Fire ReX Jeweller



Additional information

Compliance with standards

[Learn more >](#)

User manual

[Learn more >](#)

Warranty

24 months

[Learn more >](#)

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

Request extra help

✉ support@ajax.systems

🗉 [@AjaxSystemsSupport_Bot](#)

💬 [Send a request](#)



Rating 4.8

4,500,000

people worldwide under Ajax protection

💡 [Suggest a feature](#)



Products

[Intrusion protection](#)

[Video surveillance](#)

[Fire and life safety](#)

[Comfort and automation](#)

[All products](#)

[Services](#)

[System integrations](#)

Software

[Ajax Security System](#)

[Ajax PRO: Tool for Engineers](#)

[Ajax Desktop](#)

[Ajax PRO Desktop](#)

[Ajax TV](#)

[Ajax Translator PRO](#)

[Ajax Cloud Signaling](#)

[Ajax Ready products](#)

[Fibra wired protocol](#)

[Ajax radio protocols](#)

Solutions

[Customer stories](#)

[Solutions by facility type](#)

[Commercial fire detection and alarm system](#)

[Wireless Grade 3 solution](#)

[Video surveillance solution](#)

[Integration with Yale smart locks](#)

[Upgrades and retrofits](#)

[Why Ajax](#)

[How it works](#)

Company

[Blog](#)

[About us](#)

[Press page](#)

[Events](#)


[Career](#)

[Ajax Next](#)

[Reviews and feedback](#)

[Ajax Media Player](#)

[Scenarios](#)



Support

[Manuals and articles](#)

[Compliance with standards](#)

Tools

[Ajax device compatibility](#)

[CMS software compatibility](#)

[Ajax Services availability](#)

[Video storage calculator](#)

[Video device calculator](#)

[Battery life calculator](#)

[Radio communication range calculator](#)

[Switches and outlets configurator](#)

[Fibra power supply calculator](#)

[All web tools](#)

Monitoring solutions and integrations

[Intrusion alarm monitoring](#)

[Video monitoring and visual alarm verification](#)

[Audio alarm verification](#)

For partners

[For partners](#)

[Ajax Academy](#)

[Partner Portal](#)

[Ajax PRO channel](#)

 [România](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)

[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved