

Gas nailer


FOX

The efficient gas nailer
for drywall construction




Gas nailer FOX

Advantages, approvals and certificates



Suitable building materials



Designed for use it in different base materials such as concrete, steel, solid bricks and to a limited extend wood. Can be used on floors, walls, and ceilings.

Applications



Drywall construction
Fastening of drywall profiles.



Light- duty construction applications
For fixing drainage foils on walls.



Installations
For fixing conduits, cables and pipes on floors.

Technical data of gas nailer FOX

Characteristics	Technical data
Height	385 mm
Width	130 mm
Length	327 mm
Weight	3.8 Kg (battery included)
Loading capacity	FOX 20: 20 + 2 nails* FOX 40: 40 + 2 nails*
Type of battery	Li-Ion-battery (battery lasts for 8000 nails)
Capacity of battery	2.500 mAh
Connection charger	100-240V AC. (50 or 60Hz)
Charging time	90 min for full charge
Temperature range for use	0°C to 50°C

* There must be at least 3 nails in the magazine, otherwise the nailer cannot be triggered.

Main features / Advantages



85 Joule power
ensure good quality
setting results



Gas power
2 nails per second;
high setting frequency



**Highly effective
dust protection**
Clever filter systems
at the suction and
discharge openings



Fast recharge
A 2 minutes charge
allows you to set at
least another 200 nails



Ergonomic handle
relieves the hand
during longer use



Demountable tool nose
for quick removal of
jammed nail residues



Simple and fast
depth adjustment
to adapt to various
applications



**Fast clearance of
jammed nails**
Quick release
system



**Laterally adjustable belt
hook**
for the right and left
handed



Battery indicator
prevents a standstill
at the construction
site



Li-Ion battery
Up to 8.000 fastenings
per charge



Versatile
Nails from 13 to
40 mm length for many
different base materials

Set includes

- 1 x Gas nailer FOX
- 1 x Safety goggles
- 2 x Ear plugs
- 2 x Battery Li-Ion
- 1 x Charger
- 1 x Carrying case
- 1 x Instruction manual
- 1 x Allen wrench 4
- 1 x Allen wrench 5



Gas nailer FOX

Type	Art-No	€/1 pc	[Set]	[pcs]
FOX with magazine for 20 nails	FOX20		1	–
FOX with magazine for 40 nails	FOX40		1	–



Battery and charger for gas nailer FOX

Type	Art-No	€/1 pc	[pcs]	[pcs]
FOX Battery	FOXBAT		1	–
FOX Charger	FOXCARSET		1	–



High-performance gas for gas nailer FOX

Type	Art-No	Height [mm]	Content [ml]	Shelf life [months]	€/1 pc	[pcs]	[pcs]
Fuel cell*	91GASA	180	80	24		1	20

* sufficient for min. 1.000 nails

Steel nails FOX TKA & XHA

Advantages



TKA standard nails for gas nailer FOX



XHA premium nails for gas nailer FOX


- TKA:
 - standard nails for concrete and solid bricks
 - Nail 15 mm especially hardened for steel
- XHA:
 - Premium nails
 - Nail 13 mm especially hardened for steel
 - Grooved nails to improve grip
- Each box includes one high-performance fuel cell, sufficient for 1.000 nails

Approvals and certificates



TKA standard nails for FOX

Mounting

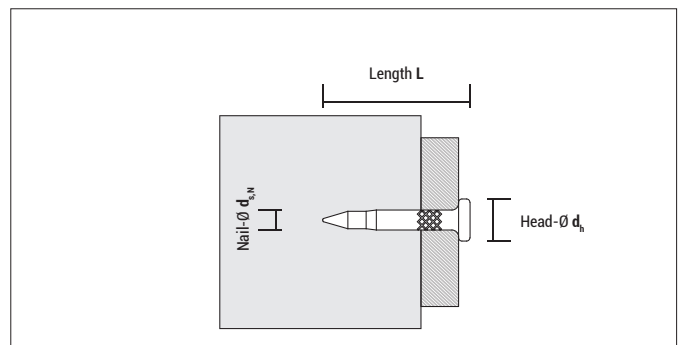

+ each box includes one high-performance fuel cell



Type	Art-No	Nail-Ø $d_{s,N}$ [mm]	Length L [mm]	Head-Ø d_h [mm]	€/100 pcs	[pcs]	[pcs]
TKA nails 15 mm + fuel cell	9151000TKA	2,6	15	6,3		1.000	5.000
TKA nails 19 mm + fuel cell	9191000TKA	2,6	19	6,3		1.000	5.000
TKA nails 25 mm + fuel cell	9251000TKA	2,6	25	6,3		1.000	5.000
TKA nails 30 mm + fuel cell	9301000TKA	2,6	30	6,3		1.000	5.000
TKA nails 40 mm + fuel cell	9401000TKA	2,6	40	6,3		1.000	5.000



+ each box includes one high-performance fuel cell



XHA premium nails for FOX

Type	Art-No	Nail-Ø d _{s,N} [mm]	Length L [mm]	Head-Ø d _h [mm]	€/100 pcs	[pcs]	[pcs]
XHA premium nails 13 mm + fuel cell*	9131000XHA	3	13	6,3		1.000	5.000
XHA premium nails 17 mm + fuel cell	9171000XHA	3	17	6,3		1.000	5.000
XHA premium nails 22 mm + fuel cell	9221000XHA	3	22	6,3		1.000	5.000
XHA premium nails 27 mm + fuel cell*	9271000XHA	3	27	6,3		1.000	5.000
XHA premium nails 32 mm + fuel cell*	9321000XHA	3	32	6,3		1.000	5.000
XHA premium nails 38 mm + fuel cell*	9381000XHA	3	38	6,3		1.000	5.000

* No stock item; only available on request



Pre-nailing drill bit SDS plus

Typ	Art-No	Drill bit length [mm]	Diameter [mm]	Outer-Ø [mm]	€/1 pc	[pc]	[pcs]
BSDS 5x10	510BSDS	10	5	14,2		1	—



Overview - Suitable building materials for XHA and TKA FOX

	XHA 13 mm	TKA 15 mm	XHA 17 mm	TKA 19 mm	XHA 22 mm	TKA 25 mm	XHA 27 mm	TKA 30 mm	XHA 32 mm	XHA 38 mm	TKA 40 mm
Steel (min. thickness 3,5 mm)	●	●									
Concrete > C20/25		●	●	○	○						
Concrete C20/25			○	●	●	●	○				
Solid brick			○	●	●	●	●	●	○	○	○
Hollow brick						●	●	●	●		
Wood										●	●

● very suitable

○ suitable to a limited extent