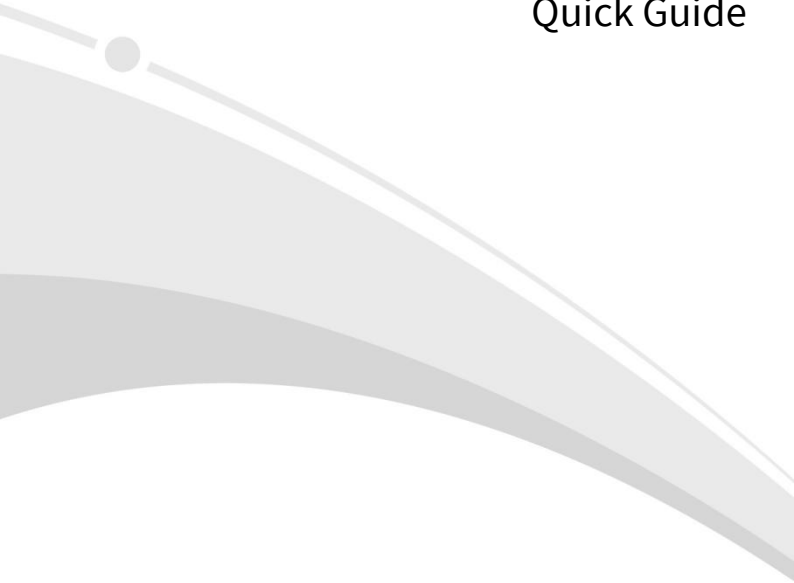


LCD Splicing Display Unit

Quick Guide

A decorative graphic on the left side of the page. It features a grey circle on a thin grey line that curves downwards. Below this, there are two larger, overlapping curved shapes in shades of grey, creating a layered, abstract effect.

1 Safety Instructions

The device must be installed, serviced and maintained by a trained professional with necessary safety knowledge and skills. Before installation, be sure to carefully read and implement the safety instructions specified in this manual.

- The power supply meets the requirements indicated on the device, and the power voltage is stable. The power supply of the splicing system (such as decoder, video wall controller, matrix, and splicing screen) must use an appropriate UPS or a voltage stabilizer whose normal power is greater than 1.5 times the power used by the splicing system. The splicing system must use a three-phase socket with a protective grounding wire.
- The splicing system shall be powered in phase with the image controller and control PC, but out of phase with high-power equipment such as high-power air conditioner.
- All the grounding devices must be securely grounded, and the grounding wire of all devices must be connected to an equipotential socket to ensure that there is no voltage difference between the devices. The grounding bus shall use multi-core copper wires, and cannot be shorted or mixed with the neutral wire of the power grid.
- Ensure that the device operates in an environment where the temperature is in the range of 0°C-40°C, and the relative humidity (RH) is in the range of 20%-80% (non-condensing). Avoid large temperature or humidity fluctuations, and ensure that changes in temperature and humidity occur gradually. If the temperature is not within the specified range, it may cause device malfunctions. In areas with high humidity, install a dehumidifier to maintain the required humidity levels.
- To install the device on the ground, make sure that the ground is flat and solid with a strong load-bearing capacity first. The rack is generally installed on the cement floor. To install it on a floor, reinforce the floor first.
- Wiring troughs for strong and weak currents must be strictly separated. A short wiring distance is preferred. The connection of wiring troughs must be smooth without burrs and sharp corners. The wiring troughs must be properly grounded and shielded.
- Do not block the ventilation holes. If the internal temperature of the device rises, it may cause a malfunction.
- Keep the maintenance channel well ventilated. Keep the device at a distance of around 3m from the air conditioning.
- Do not open the cabinet as there are high voltage components inside.

- Handle with care during transportation and installation. Do not knock, squeeze or carve the screen with hard objects. User shall assume total responsibility for damages caused by improper user operations.
- When installing the device, keep a minimum of 0.6mm gap between devices to avoid screen damage caused by thermal expansion and contraction. When sealing the screen with surrounding decorations, leave at least a 20mm gap around the screen for ventilation.
- Use the device in a clean environment. The dust concentration shall meet the office environment requirements.
- Do not leave the device in standby for a long time. When you do not use the device for a long time, disconnect the power.
- Do not switch on and off frequently. The interval between on and off cannot be less than 3 minutes.
- Keep liquid of any kind, sharp objects, metals from entering the vents or contacting the connectors. Otherwise, it may cause electric shock, short circuit or device failure. Keep away from children.

2 Packing List

Contact your local dealer if the package is damaged or incomplete. The package contents may vary with device model.


No.	Name	Qty	Unit
1	Splicing screen	1 or 2	PCS
2	RS232 cable	1 or 2	PCS
3	Grounding cable	1 or 2	PCS
4	Power cable	1 or 2	PCS
5	Remote control	1	PCS
6	Infrared receiving cable	1	PCS
7	Product documents	1	Set

Remarks: In a package with one splicing screen, the quantity of items 1 to 4 is 1; in a package with two splicing screens, the quantity of items 1 to 4 is 2.

3 Product Overview


This guide applies to a variety of products, and the appearance may vary with device model.

3.1 Appearance

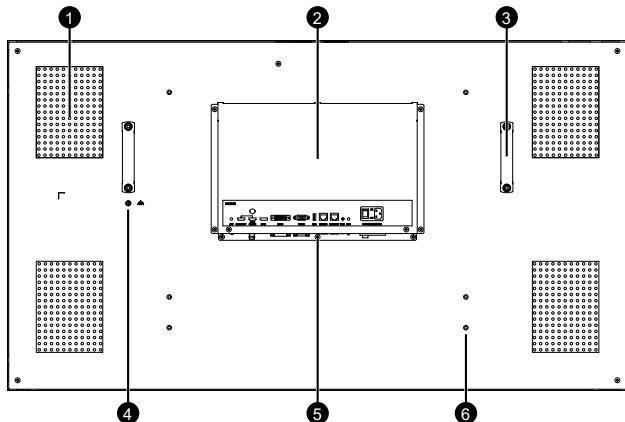

1. Vent	2. Back box	3. Handle
4. Grounding screw	5. Interfaces	6. Bracket mounting hole

3.2 Interfaces

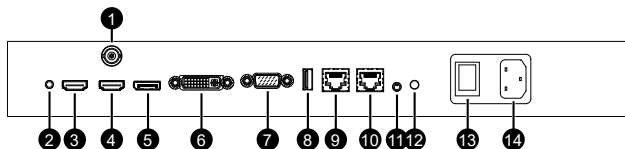

No.	Interface	Description
1	AV IN	AV input interface, connects the video source device to receive video signals.
2	KEY	Key button, press to start testing the image.
3	HDMI LOOP	HDMI loop out interface, connects the HDMI input interface of the next splicing screen to transmit video signals. NOTE: Maximum number of HDMI loop connections: 9.
4	HDMI IN	HDMI input interface - Connects the video source device to receive video signals. - Connects the HDMI loop interface of the previous splicing screen to receive video signals.
5	DP IN	DP input interface, connects the video source device to receive video signals.
6	DVI IN	DVI input interface, connects the video source device to receive video signals.
7	VGA IN	VGA input interface, connects the video source device to receive video signals.
8	USB	USB 2.0 interface, connects the USB flash driver. - Upgrades the splicing screen. - Plays image and video from the USB flash driver.
9	RS232 IN	RS232 input interface - Connects the RS232 output interface of the external device (for example, decoder) to remotely power on/off the splicing screen. - connects the RS232 output interface of the previous splicing screen to receive control signals.

No.	Interface	Description
10	RS232 OUT	RS232 output interface, connects the RS232 input interface of the next splicing screen to transmit control signals.
11	IR IN	IR receiving interface, connects the infrared receiving cable to receive control signals from the remote control.
12	RUN	Operation indicator. ● Steady red: Standby. ● Steady green: Startup. ● Steady orange: Overheating.
13	Power button	Turn on/off the splicing screen after power-on.
14	AC IN	Power input interface. Connects to the power supply with reference to the marked voltage range.


4 Remote Control



NOTE!

The buttons not shown in the table below are reserved functions and are currently unavailable.

Button	Description	Diagram
	Turn on/off the device. CAUTION: After you turn off the device using the remote control, the device remains powered on. Please be aware of fire and electric hazards.	
	Switch signal sources.	

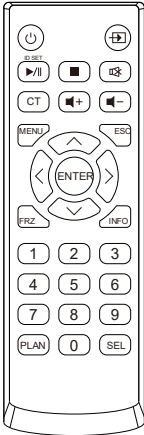Button	Description	Diagram
	- Play/pause video from the USB flash driver. - Set the splicing screen ID.	
	Stop playing video from the USB flash driver and exit the screen.	
CT	Switch the color temperature of the screen.	
	- Choose up/down/left/right. - Change values.	
ENTER	Confirm the selection.	
MENU	- Open the menu screen. - Return to the previous screen.	
ESC	Exit the menu.	
FRZ	Pause/resume video on the screen NOTE: When you pause video on the screen, the video source still plays the video; when you resume video, the screen shows the current video of the video source.	
INFO	Show the current video source information.	
0~9	Select the number.	
SEL	Select the splicing screen you want to control.	

5 Cable Connection



NOTE!

The RS232 interface is an RJ45 connector. It must be connected with a straight-through network cable instead of a crossover network cable.

If the video signal transmission distance exceeds 5m, you need to use high-quality video cables to ensure the image quality. Poor quality cables may cause image noises or unstable images.

6 Troubleshooting

Problem	Solution
Boot failure (power indicator is off)	● Check if the power cord is damaged. ● Check if the device is connected to the mains. ● Check if the device is powered on. ● Check if the power switch is damaged. ● Check if the fuse is blown.
No signal displayed	● Check if you have selected the correct signal source. ● Check if the signal cable is connected correctly.
Abnormal images	Check if the image resolution is supported by the device.
Abnormal RS232 control	● Check if the RS232 cables are connected correctly. ● Check if RS232 control is normal on the neighboring splicing screens.

Problem	Solution
Blurry images	● Check for loose cables and damaged connector pins. ● Check the quality of cables. ● Check if the screen parameters are set correctly.
Shaky/unstable images	● Replug the signal cable. ● Replace the signal cable.
No loop signal	● Check if the signal type is correct. ● Check if the cables are connected correctly. ● Check if the interface of the HDMI board is damaged.
Water ripples/noises	● Check if the signal source and the screen are in a power circuit. ● Check if the water ripples come from the signal source. ● Check if the output interface is connected properly. ● Check if the signal input cable is too long. ● Check if the input signal cable connector is loose or the gold plating is peeling.

7 Maintenance

In daily use, please perform maintenance operations as follows.

1 Do not open the cabinet yourself

Do not open the cabinet yourself. The high voltage inside will endanger your personal safety.

2 Keep away from fire and water

Do not place the device near candles, water, etc., otherwise the device may be damaged. Such damage is not covered by the warranty.

3 Do not touch the screen

Do not touch the screen, such as poking or pressing the screen with your fingers or sharp objects (e.g., pen tip, tiny hard particles on the cleaning cloth), it may result in a broken screen, liquid crystal leakage, etc. Such damage is not covered by the warranty.

4 Do not assemble the device yourself

Do not service the device yourself in the event of a device failure. Please seek help from the authorized personnel in time, and conduct troubleshooting under their guidance.

Do not hang other LED displays around the device by yourself. Otherwise, we are not responsible for any damage to the device caused by this.

5 Avoid long-term operation at full capacity

According to the principle of high-temperature aging, electronic products running continuously for long periods may suffer accelerated aging, significantly reducing their lifespan. Prolonged static images on the screen can also cause certain pixel liquid crystals to polarize. Continuous operation should not exceed 20 hours. If long-term operation is necessary, allow the device to rest for 15 to 30 minutes after every 20 hours of continuous use.

6 Precautions on cleaning the device

Be sure to use a soft and non-fiber cloth such as a dust-free cloth or a soft silk cloth. Do not use rough fibrous cloths such as linens and toilet paper, it may leave scratches on the screen.

Be sure to use anhydrous alcohol or special cleaners (please purchase under the guidance of our technical support). Do not spray aqueous solutions and corrosive chemical liquids such as acetone, toluene, chloromethane, disinfectant, sulfuric acid and aqueous alcohol on the screen, it may cause dust accumulation and screen corrosion.

Be sure to clean the screen from the four sides to the center to prevent dirt, dust, and other contaminants from entering the frame.

7 Dust regularly

To ensure the device performance, please dust the device regularly and keep the maintenance channel clean. It is strictly prohibited to use blow-drying equipment to blow dust into the internal parts of the device. Dust accumulation will cause abnormalities such as unclear images and black screen on the edges. And users shall clean the device regularly to avoid such abnormalities. Such damage is not covered by the warranty.

Disclaimer and Safety Warnings

Copyright Statement

©2020-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

No part of this manual may be copied, reproduced, translated or distributed in any form or by any means without prior consent in writing from Zhejiang Uniview Technologies Co., Ltd (referred to as Uniview or us hereafter).

The product described in this manual may contain proprietary software owned by Uniview and its possible licensors. Unless permitted by Uniview and its licensors, no one is allowed to copy, distribute, modify, abstract, decompile, disassemble, decrypt, reverse engineer, rent, transfer, or sublicense the software in any form by any means.

Trademark Acknowledgements



are trademarks or registered trademarks of Uniview.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

All other trademarks, products, services and companies in this manual or the product described in this manual are the property of their respective owners.

Export Compliance Statement

Uniview complies with applicable export control laws and regulations worldwide, including that of the People's Republic of China and the United States, and abides by relevant regulations relating to the export, re-export and transfer of hardware, software and technology. Regarding the product described in this manual, Uniview asks you to fully understand and strictly abide by the applicable export laws and regulations worldwide.

EU Authorised Representative

UNV Technology EUROPE B.V. Treubstraat 1, 2288 EG, Rijswijk, Netherlands.

If you have any feedback, please contact us at service@uniview.com.

Privacy Protection Reminder

Uniview complies with appropriate privacy protection laws and is committed to protecting user privacy. You may want to read our full privacy policy at our website and get to know the ways we process your personal information. Please be aware, using the product described in this manual may involve the collection of personal information such as face, fingerprint, license plate number, email, phone number, GPS. Please abide by your local laws and regulations while using the product.

About This Manual

- This manual is intended for multiple product models, and the photos, illustrations, descriptions, etc. in this manual may be different from the actual appearances, functions, features, etc. of the product.
- This manual is intended for multiple software versions, and the illustrations and descriptions in this manual may be different from the actual GUI and functions of the software.
- Despite our best efforts, technical or typographical errors may exist in this manual. Uniview cannot be held responsible for any such errors and reserves the right to change the manual without prior notice.
- Users are fully responsible for the damages and losses that arise due to improper operation.
- Uniview reserves the right to change any information in this manual without any prior notice or indication. Due to such reasons as product version upgrade or regulatory requirement of relevant regions, this manual will be periodically updated.

Disclaimer of Liability

- To the extent allowed by applicable law, in no event will Uniview be liable for any special, incidental, indirect, consequential damages, nor for any loss of profits, data, and documents.
- The product described in this manual is provided on an "as is" basis. Unless required by applicable law, this manual is only for informational purpose, and all statements, information, and recommendations in this manual are presented without warranty of any kind, expressed or implied, including, but not limited to, merchantability, satisfaction with quality, fitness for a particular purpose, and noninfringement.
- Users must assume total responsibility and all risks for connecting the product to the Internet, including, but not limited to, network attack, hacking, and virus. Uniview strongly recommends that users take all necessary measures to enhance the protection of network, device, data and personal information. Uniview disclaims any liability related thereto but will readily provide necessary security related support.
- To the extent not prohibited by applicable law, in no event will Uniview and its employees, licensors, subsidiary, affiliates be liable for results arising out of using or inability to use the product or service, including, not limited to, loss of profits and any other commercial damages or losses, loss of data, procurement of substitute goods or services; property damage, personal injury, business interruption, loss of business information, or any special, direct, indirect, incidental, consequential, pecuniary, coverage, exemplary, subsidiary losses, however caused and on any theory of liability, whether in contract, strict liability or tort (including negligence or otherwise) in any way out of the use of the product, even if Uniview has been advised of the possibility of such damages (other than as may be required by applicable law in cases involving personal injury, incidental or subsidiary damage).
- To the extent allowed by applicable law, in no event shall Uniview's total liability to you for all damages for the product described in this manual (other than as may be required by applicable law in cases involving personal injury) exceed the amount of money that you have paid for the product.

Safety Warnings

The device must be installed, serviced and maintained by a trained professional with necessary safety knowledge and skills. Before you start using the device, please read through this guide carefully and make sure all applicable requirements are met to avoid danger and loss of property.

Storage, Transportation, and Use

- Store or use the device in a proper environment that meets environmental requirements, including and not limited to, temperature, humidity, dust, corrosive gases, electromagnetic radiation, etc.
- Make sure the device is securely installed or placed on a flat surface to prevent falling.
- Unless otherwise specified, do not stack devices.
- Ensure good ventilation in the operating environment. Do not cover the vents on the device. Allow adequate space for ventilation.
- Protect the device from liquid of any kind.
- Make sure the power supply provides a stable voltage that meets the power requirements of the device. Make sure the power supply's output power exceeds the total maximum power of all the connected devices.
- Verify that the device is properly installed before connecting it to power.
- Do not remove the seal from the device body without consulting Uniview first. Do not attempt to service the product yourself. Contact a trained professional for maintenance.
- Always disconnect the device from power before attempting to move the device.
- Take proper waterproof measures in accordance with requirements before using the device outdoors.

Power Requirements

- Install and use the device in strict accordance with your local electrical safety regulations.
- Use a UL certified power supply that meets LPS requirements if an adapter is used.
- Use the recommended cordset (power cord) in accordance with the specified ratings.
- Only use the power adapter supplied with your device.
- Use a mains socket outlet with a protective earthing (grounding) connection.
- Ground your device properly if the device is intended to be grounded.

Battery Use Caution

- When battery is used, avoid:
 - Extremely high or low temperature and air pressure during use, storage and transportation.
 - Battery replacement.
- Use the battery properly. Improper use of the battery such as the following may cause risks of fire, explosion or leakage of flammable liquid or gas.
 - Replace battery with an incorrect type.
 - Dispose of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery.
- Dispose of the used battery according to your local regulations or the battery manufacturer's instructions.

Avertissement de l'utilisation de la batterie

- Lorsque utiliser la batterie, évitez:
 - Température et pression d'air extrêmement élevées ou basses pendant l'utilisation, le stockage et le transport.

- Remplacement de la batterie.
- Utilisez la batterie correctement. Mauvaise utilisation de la batterie comme celles mentionnées ici, peut entraîner des risques d'incendie, d'explosion ou de fuite liquide de gaz inflammables.
- Remplacer la batterie par un type incorrect.
- Disposer d'une batterie dans le feu ou un four chaud, écraser mécaniquement ou couper la batterie.
- Disposer la batterie utilisée conformément à vos règlements locaux ou aux instructions du fabricant de la batterie.

Regulatory Compliance

FCC Statements

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Visit https://global.uniview.com/Support/Download_Center/Product_Installation/Declaration/ for SDoC.

Caution: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

LVD/EMC Directive



This product complies with the European Low Voltage Directive 2014/35/EU and EMC Directive 2014/30/EU.

WEEE Directive-2012/19/EU



The product this manual refers to is covered by the Waste Electrical & Electronic Equipment (WEEE) Directive and must be disposed of in a responsible manner.

Battery Regulation- (EU) 2023/1542



Battery in the product complies with the European Battery Regulation (EU) 2023/1542. For proper recycling, return the battery to your supplier or to a designated collection point.