

Tech specs

EN54 LINE

EN54 FireProtect (VAD) Jeweller

Wireless addressable visual fire alarm device (VAD)



Device compatibility

Check

Communication

Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced sabotage protection.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

Learn more [➤](#)

Frequency bands

866.0 – 866.5 MHz

868.0 – 868.6 MHz

868.7 – 869.2 MHz

905.0 – 926.5 MHz

915.85 – 926.5 MHz

921.0 – 922.0 MHz

Depends on the sales region.

Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and radio interference.

Radio signal modulation

GFSK

Radio communication range

up to 1,700 m

Between the device and control and indicating equipment (CIE) or a range extender in an open space.

Calculate radio communication range at the facility >

Encrypted communication

All stored and transmitted data is protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

Learn more

Alarm annunciation

Alarm type

light

LED frame.

Flash frequency

90 ms ON / 1,910 ms OFF (cycle duration: 2,000 ms; frequency: 0.5 Hz)

Alarm annunciation test

To check the visual alarm signal to ensure fire alarm signals are visible in the premises.

Installation recommendations

The device's recommended installation height is up to 3 m on the ceiling and up to 2.4 m on the wall.

The device is designed for outdoor and indoor use.

Sabotage protection

Tamper button


Fault notification when an attempt is made to remove the device from the mounting panel.

Learn more >

Lock for SmartBracket

to secure the device on the
SmartBracket mounting panel

When locked, the lock secures the device
and prevents it from being removed
without a special tool.

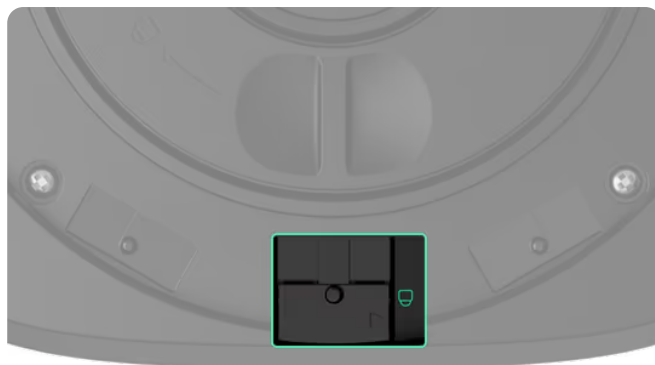

Protection against spoofing

device authentication

Connection loss detection

after 36 s

Detection time depends on **Jeweller**
settings.

Power supply

Battery

4 × CR123A

Pre-installed.

Tool-free battery replacement

To replace the batteries, turn the battery compartment cover counterclockwise.



Reverse polarity protection

Prevents device damage if the batteries are put in incorrectly.

Recommended battery type

Huiderui CR123A; 3 V; 1,600 mAh,
LiMnO₂

Calculated battery life

up to 5 years


Enclosure

Dimensions

145 × 145 × 51 mm

Weight

509 g

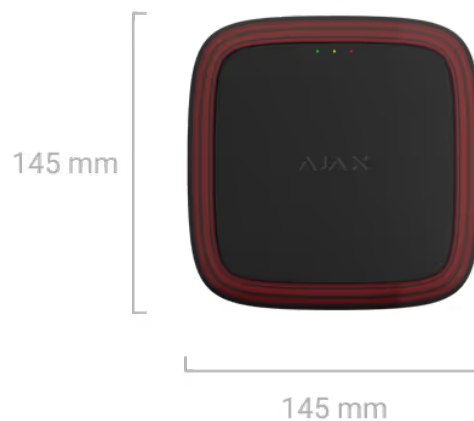

Operating temperature range

from $-10\text{ }^{\circ}\text{C}$ to $+60\text{ }^{\circ}\text{C}$

Operating humidity

up to 80%

Protection class

IP54

Flammability rating

UL 94 V-0



51 mm

Color

Black



White



Red



Complete set

EN54 FireProtect (VAD) Jeweller

4 × CR123A battery (pre-installed)

SmartBracket mounting panel

Installation kit

Quick start guide

Revision

1

Certification and compliance with standards



EN54 FireProtect (VAD) Jeweller



Additional information

Compliance with standards

Learn more >

User manual

Learn more >

Warranty

24 months

Learn more >

Subscribe

Subscribe to our emails about secure life. No spam.

Subscribe

Request extra help

✉ support@ajax.systems

📍 @AjaxSystemsSupport_Bot

💬 Send a request



Rating 4.8

4,500,000

people worldwide under Ajax protection

💡 Suggest a feature



Products

Intrusion protection

Video surveillance

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Fibra wired protocol

Ajax radio protocols

Solutions

Customer stories

Solutions by facility type

Commercial fire detection and alarm system

Wireless Grade 3 solution

Video surveillance solution

Integration with Yale smart locks

Upgrades and retrofits

Why Ajax

How it works

Software

Ajax Security System

Ajax PRO: Tool for Engineers

Ajax Desktop

Ajax PRO Desktop

Ajax TV

Ajax Translator PRO

Ajax Cloud Signaling

Scenarios



Available on
App Store



Available on
Google Play

Support

Manuals and articles

Compliance with standards

Tools

Ajax device compatibility

CMS software compatibility

Ajax Services availability

Video storage calculator

Video device calculator

Battery life calculator

Radio communication range calculator

Switches and outlets configurator

Fibra power supply calculator

All web tools

Monitoring solutions and integrations

Intrusion alarm monitoring

Video monitoring and visual alarm verification

Audio alarm verification

Company

[Blog](#)

[About us](#)

[Press page](#)

[Events](#)

[Career](#)

[Ajax Next](#)

[Reviews and feedback](#)

For partners

[For partners](#)

[Ajax Academy](#)

[Partner Portal](#)

[🇷🇴 România](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)
[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved