


Analogue-addressable fire visual alarm device with red flash

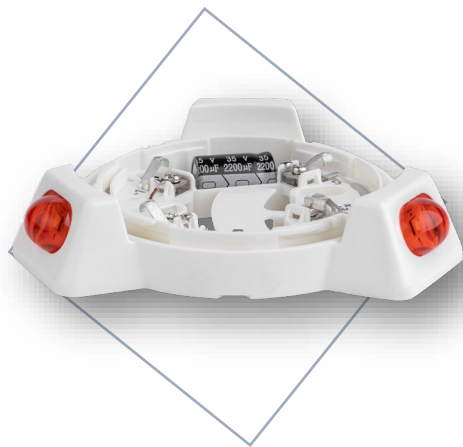

- Base with visual indication according to EN54-23
- Does not require a separate loop address
- Special info plate for placing a sticker with device address / name

SensoIRIS VAD RST is EN54-23 approved base with with built-in red LED flash beacons.

The base is specially designed for use with analogue-addressable sounders SensoIRIS CSOU and SensoIRIS CSOU IS, as expands their application in fire alarm installations providing additional visual indication in case of fire alarm events.

The activation of LED flashers in case of fire alarm event is automatic and there is no need of any additional connections between the base and sounder. SensoIRIS VAD RST is equipped with a special info plate for placing an analogue-addressable or write down specific information for the device.

Features

- Compatible with SensoIRIS CSOU / CSOU IS sounders
- Protection Degree - IP21C (with mounted sounder)
- Wire gauge for terminals - 0.4 - 1.5mm²
- Loop powered
- Does not require a separate loop address
- Special info plate (size 45x15mm) for placing a sticker with device address / name

Technical Specifications

| | |
|--------------------------------|-------------------------------|
| Operating Voltage Range | 20-32V DC (Nom. 27V DC) |
| Nominal Consumption (stand-by) | < 650µA@27V DC |
| Coverage volume: | C-3-5 |
| Maximal Consumption | < 19mA |
| Installation method | Ceiling mount |
| Frequency of the flash beacons | 0.5Hz |
| Color of the LEDs | Red |
| Material, color | ABS plastic, white (RAL 9016) |
| Dimensions | 122x139x27 mm |
| Operation temperature | -35°C to +50°C |

Last update: 03.2025