VERSION	DATE	REMARK
A/0		FIRST ISSUED

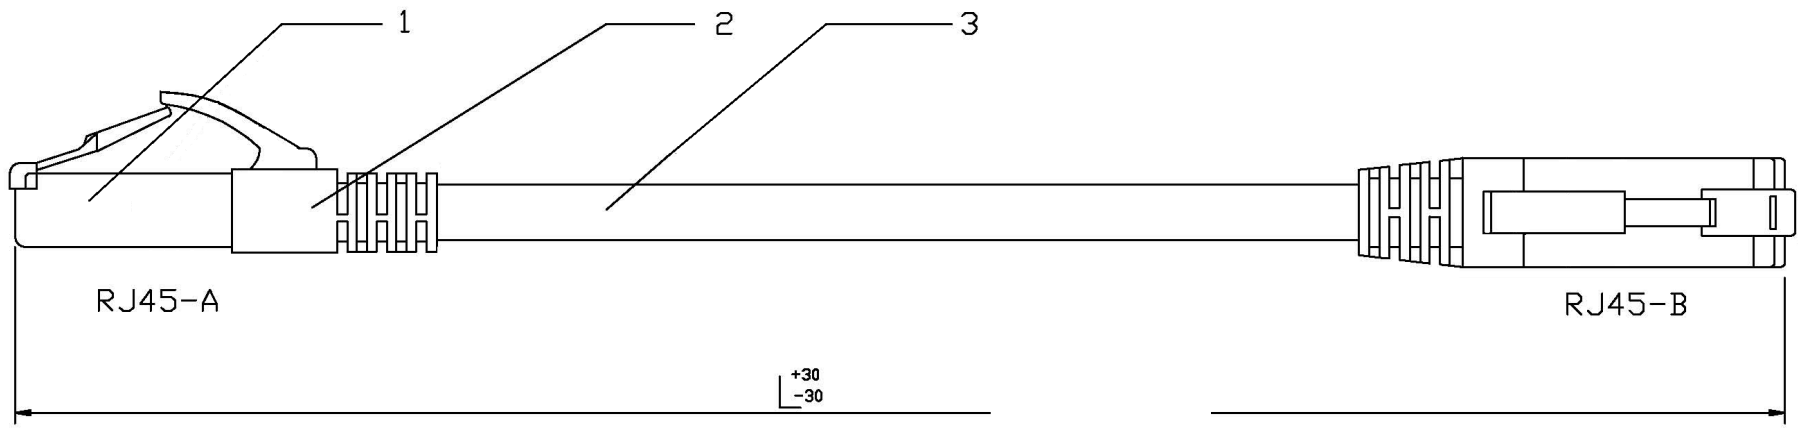

NOTES:

1. COMPLY WITH AMSI/TIA/EIA-568-C.2;
2. ACCORDING TO ISO/IEC-11801;
3. FULLY RoHS AND REACH COMPLIANT;
4. 100% SHORT AND OPEN TEST;
5. FLUKE TEST PASS GUARANTEE;
6. SUPPORT MOST DATA&VOICE APPLICATIONS;



WIREMAP(568B)

RJ45(A)	COLOR	RJ45(B)
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
4	BLUE	4
5	WHITE/BLUE	5
6	GREEN	6
7	WHITE/BROWN	7
8	BROWN	8

COLOR	LENGTH (uinit:mm)	TOLERANCE (uinit:mm)
RAL7035	150	+30
RAL7035	250	+30
RAL7035	500	+20
RAL7035	1000	±20
RAL7035	2000	±20
RAL7035	3000	±20
RAL7035	5000	±20

NO	ITEM	DESCRITPION	Q'TY	UNIT
3	CABLE	UTP Cat.6 -- 4×2×7/0.14±0.008mm bare copper + 0.8±0.05mm HDPE insulation + center cross + 5.4±0.2mm LSZH	A/R	M
2	BOOT	MOLDING PVC	A/R	KG
1	PLUG	RJ45 plug, 8P8C, UTP Cat.6, gold plated pin	2	PCS

TITLE: CAT.6 UTP PATCH CORD		UNIT:	MM
		SHEET:	1/1
		SCALE:	NA
		PROJ.	
DWG NO.:	GYAC6-011	REV:	A/0
APPROVE:	CHECK:	DRAW:	
YOU CHEN	KEVIN WANG	H	