

Tech specs

NVR (16-ch)

Network video recorder for 16 channels



Videostream

NVR models

16-channel

With up to 4K resolution (25/30 FPS).

IP cameras

- ONVIF (Profile S/T)
- RTSP

Learn more 

Storage

hard drive with a capacity of up to 16 TB (SATA connectivity, 3.5" size)

HDD not included. The hard drive with power consumption of up to 7 W can be connected.

Decoding formats

H.265

H.264

Bandwidth

up to 100 Mbps

Recommendations

The device operating voltage is 110–240 V~.

NVR is designed for indoor installation only.

Communication channels

Ethernet

up to 100 Mbps

Bluetooth

BLE frequency band: 2.400–2.4835 GHz

To set up an Ethernet connection.

Radio signal power

2.5 mW (100 mW limit)

Key features

Motion detection

NVR has built-in software to detect the motion in the frame. Possible to switch between image analysis by NVR or camera algorithms.

In-app video management system

- Videowall that combines images from all connected cameras.
- Event filters.
- Timeline with smooth preview.

Visual verification of Ajax alarms

NVR allows setting up a scenario in which Ajax detectors trigger specific cameras to start recording. This results straight in mobile and desktop (monitoring) apps.

Support for ONVIF authorization

Profile S

Profile T (partially)

Ajax cameras and NVRs can be integrated into third-party video management systems (VMS).

Learn more 

Privacy

Access rights distribution for users in mobile apps and for monitoring operators in PRO Desktop.

Power supply

Main

110–240 V~, 50/60 Hz, 0.6 A

Up to 24 W of mains power consumption.

Backup

CR2032 battery, 3 V

Only to power the system clock.

Sabotage protection

Tamper alarm

Notifications about attempts to detach the device from the surface or remove it from the mounting panel.

Learn more [➤](#)


Enclosure

Dimensions

193 × 193 × 47 mm

Weight

615 g

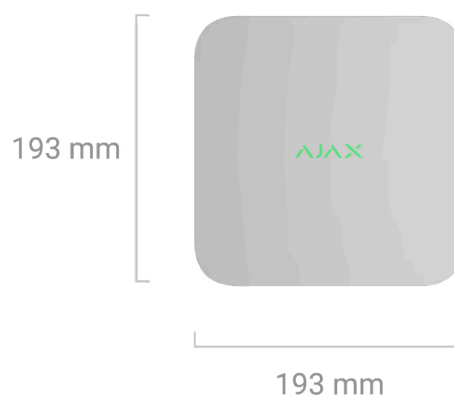

Without a hard drive.

Operating temperature range

from 0 °C to +40 °C

Operating humidity

up to 75%

Protection class

IP20



47 mm

Colors

Black



White



Complete set

NVR

SmartBracket mounting panel

Power cable

Ethernet cable

Installation kit

Quick start guide

Certification and compliance with standards



NVR (16-ch)



Additional information

Compliance with standards

[Learn more](#) >

User manual

[Learn more](#) >

Warranty

24 months

[Learn more](#) >

Subscribe

Subscribe to our emails about secure life. No spam.


Subscribe

Request extra help

✉ support@ajax.systems

📍 @AjaxSystemsSupport_Bot

💬 Send a request



Rating 4.7

4,000,000

people worldwide under Ajax protection

💡 Suggest a feature



Products

Intrusion protection

Video surveillance

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Fibra wired protocol

Ajax radio protocols

Software

For users

Ajax PRO: Tool for Engineers

Ajax Desktop

Ajax PRO Desktop

Ajax Translator PRO

Ajax Cloud Signaling

Scenarios



Available on
App Store



Available on
Google Play

Solutions

Customer stories

Solutions by facility type

Commercial fire detection and alarm system

Upgrades and retrofits

Why Ajax

Support

Manuals and articles

Compliance with standards

Tools

Ajax device compatibility

[How it works](#)

[Video storage calculator](#)

[Video device calculator](#)

[Battery life calculator](#)

[Radio communication range calculator](#)

[Switches and outlets configurator](#)

[Fibra power supply calculator](#)

[All web tools](#)

Company

[Blog](#)

[About us](#)

[Press page](#)

[Events](#)

[Career](#)

[Ajax Next](#)

[Students at CES 2026](#)

[Reviews and feedback](#)

For partners

[For partners](#)

[Ajax Academy](#)

[Partner Portal](#)

[!\[\]\(bff896c19919791b89ab521f039b410a_img.jpg\) România](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)
[Anti-Spam Policy](#) [End user agreement](#) [Warranty](#)

© 2025 AJAX SYSTEMS CH. All rights reserved