
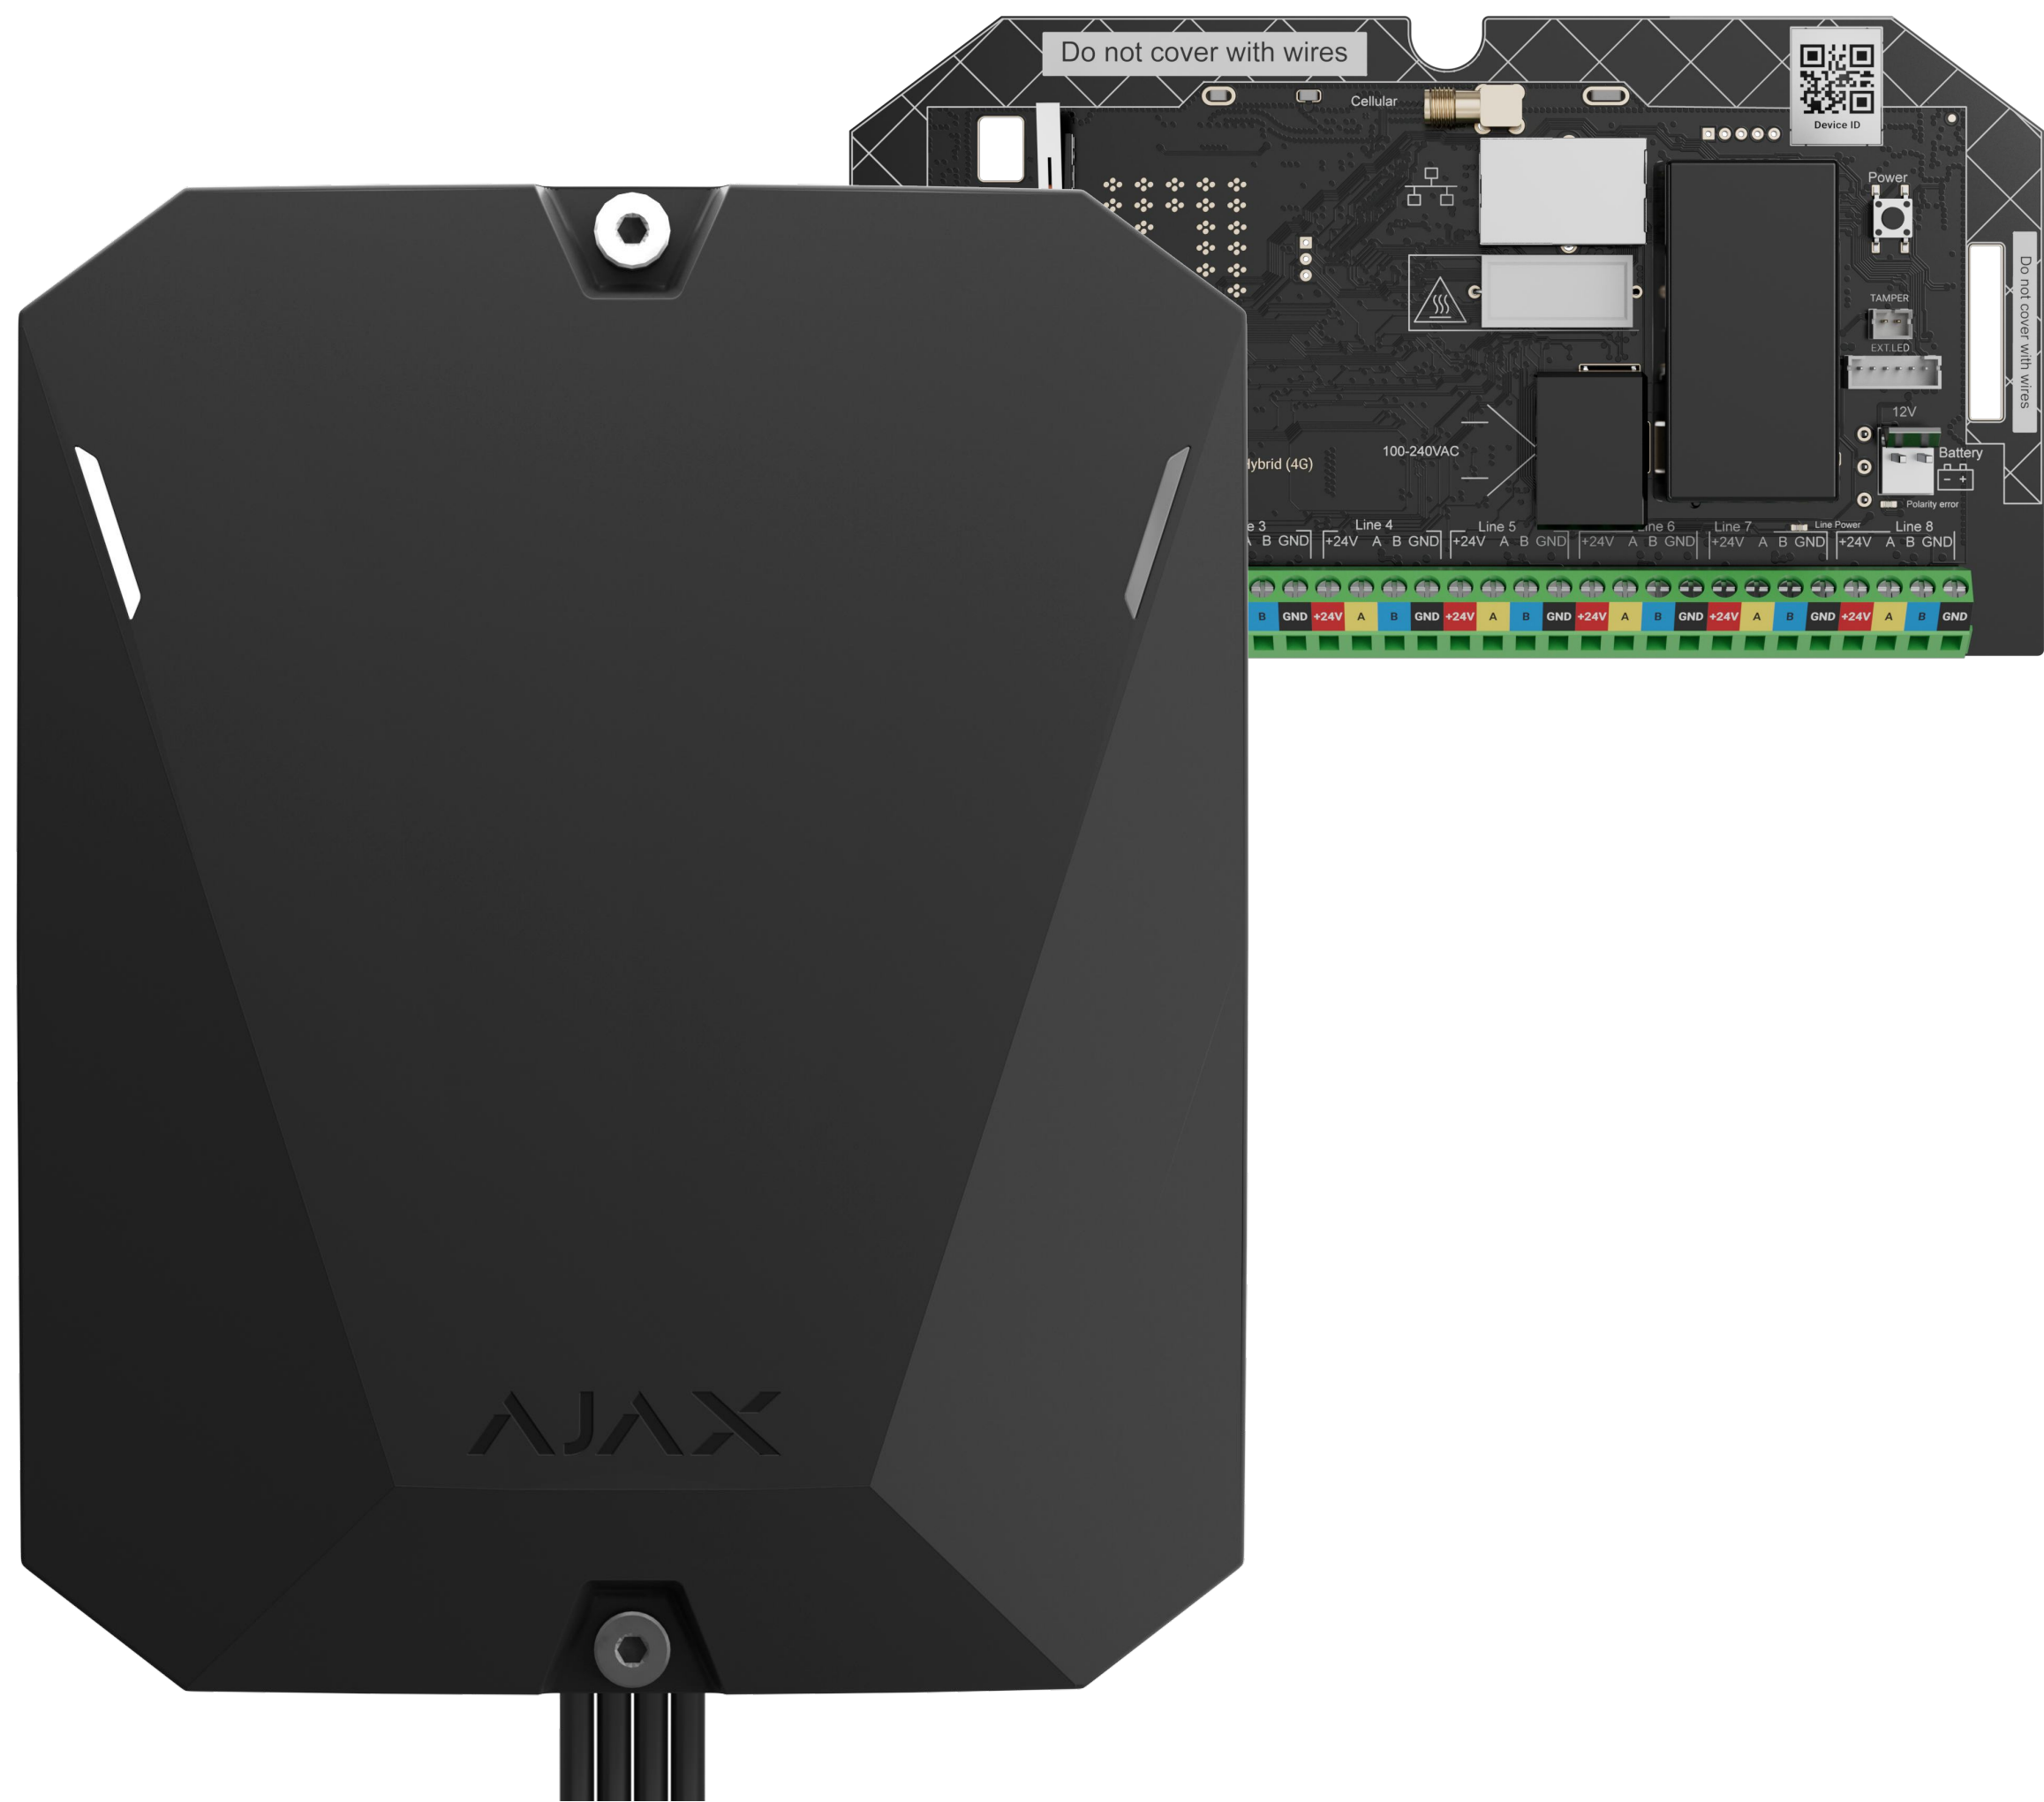


Hub Hybrid

Soon to be: Superior Hub Hybrid (2G) / (4G)

Hybrid control panel supporting photo verification.
Works with Fibra and Jeweller devices.
Connectable via Ethernet and two SIM cards.

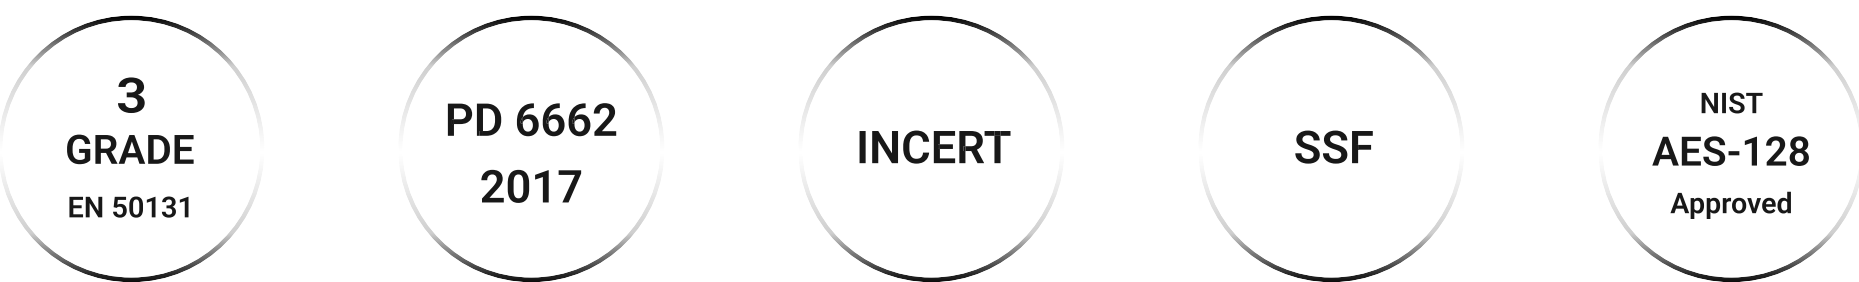

This is a device of the Superior product line. Only accredited Ajax Systems partners can sell, install, and administer Superior products.

Product versions

Hub Hybrid (2G)	Hub Hybrid (4G)	Hub Hybrid (4G) (without casing)
Shipped with a standard casing	Shipped with a standard casing	Shipped as a board without casing for installation in Case D (430)
2G support	2G, 3G, and 4G/LTE support	2G, 3G, and 4G/LTE support
Built-in internal antennas for radio and cellular communication	Built-in internal antennas for radio and cellular communication	Built-in internal antennas for radio and cellular communication, supports ExternalAntenna for installation in challenging environments
Built-in internal tamper	Built-in internal tamper	Built-in internal tamper with support for external tamper connection
Built-in internal LED	Built-in internal LED	Comes with an external LED board

Synergy of communication technologies

Ajax systems use secure two-way communication based on proprietary protocols. Ajax devices have **up to 2,000 m (6,550 ft) of wired or wireless communication**¹ without requiring radio signal boosters or line extenders. All Ajax communication protocols use polling to display current device statuses and transmit alarms, events, and all the readings into the Ajax apps. Additionally, it supports block cipher encryption and device authentication on every session with the hub to prevent sabotage, spoofing, and data theft.

FIBRA

Wired protocol

The protocol transmits alarms, events, and photo verifications. Fibra lines are multifunctional and allow different types of devices to be connected to a single line.

JEWELLER

Wireless protocol

The protocol transmits alarms and events. It features automatic power adjustment for energy efficiency and uses low-noise frequencies for more stability. Radio hopping protects against signal interception, with the hub automatically switching frequencies and notifying of any jamming attempts.

WINGS

Wireless protocol

The protocol transmits photos and large data packages. In case of connection loss, Wings sends data backups from the detector to the hub once the connection is restored.

Sabotage resistance

- Tamper alarm
- Short circuit detection
- Instant detection of line breakage
- Device authentication to prevent spoofing
- Ring topology: if the ring breaks, the connection splits into two lines that continue to operate as usual

Quick installation and setup

- Pairing with the system via QR code
- On-site or remote configuration and testing
- Automatic line scanning adds up to 100 physically connected devices in 10 minutes
- Power consumption stress test
- Automatic synchronization with CMS

Compliance EN 50131 (Grade 3) PD 6662:2017 INCERT SSF NIST (AES-128)	Communication with Ajax devices Fibra communication technology Wired connection 4×2×0.51 U/UTP cat.5 cable with a copper conductor 4×0.22 signal cable with a copper conductor Communication range up to 2,000 m up to 6,550 ft With 4×2×0.51 U/UTP cat.5 cable Jeweller and Wings communication technologies Communication range up to 2,000 m up to 6,550 ft In an open space Frequency bands 866.0–866.5 MHz 868.0–868.6 MHz 868.7–869.2 MHz 905.0–926.5 MHz 915.85–926.5 MHz 921.0–922.0 MHz Depends on the sales region Maximum effective radiated power (ERP) ≤ 25 mW	Communication channels Ethernet 8P8C socket Up to 100 Mb/s Cellular networks 2 slots for micro-SIM For Hub Hybrid (2G) 2G GSM900/DCS1800 (B3/B8) For Hub Hybrid (4G) 2G GSM900/DCS1800 (B3/B8) 3G WCDMA 850/900/2100 (B1/B5/B8) 4G/LTE FDD B1/B3/B5/B7/B8/B20 Automatic switching between communication channels - up to 4 minutes between SIMs - instantly between 4G, 3G, and 2G networks of one SIM - instantly between Ethernet and SIM	Capacity Ajax devices up to 100 - Wired and wireless devices in any proportion 5 range extenders max 10 sirens or keypads with a built-in siren max Fibra lines 8 outputs Ajax wired devices can be connected with 8 lines (1 line uses 1 output) or 4 rings (1 ring uses 2 outputs) Cameras or DVRs - up to 36 Ajax NVRs - up to 224 Ajax cameras via Ajax NVRs - up to 492 standalone cameras Users up to 50 Automation scenarios up to 32 Security groups up to 9 Rooms up to 50 Event log up to 1000 events Alarms and events are saved on the non-volatile onboard flash memory
Power supply Main power supply type Type A Operating AC voltage 100–240 V~, 50/60 Hz Up to 10 W of mains power consumption Fibra line 24 V== The hub powers connected devices Operating DC voltage 10.5–15 V== From the backup battery with a capacity of 4, 7, or 9 A·h (not included in the complete set) Autonomous operation up to 60 hours 7 A·h backup battery can power a system of 30 wired devices for 60 hours, while wireless devices already operate on batteries	Hub with a standard casing Color white, black Dimensions 192 × 238 × 100 mm 7.56" × 9.37" × 3.94" Weight of the black device 765 g 26.98 oz Weight of the white device 837 g 29.52 oz Protection class IP30, IK06 Hub without casing Color black Dimensions 185 × 99 × 43 mm 7.28" × 3.89" × 1.69" Weight 184 g 6.49 oz	Installation Operating temperature range from –10 °C to +40 °C from 14 °F to 104 °F Operating humidity up to 75% ⚠ Note that the hub version without casing installed inside Case D (430)	Complete set Hub Hybrid (4G), Hub Hybrid (2G) Hub board Casing Power cable Screw terminal block adapter² 12 V== battery connection cable Ethernet cable 8 terminating resistors (120 Ω) Installation kit Quick start guide Hub Hybrid (4G) (without casing) Hub board Power cable Screw terminal block adapter² 12 V== battery connection cable Ethernet cable 8 terminating resistors (120 Ω) External LED board Cable for external LED board Installation kit Quick start guide

¹ For wired communication, the value applies when using a 4×2×0.51 U/UTP cat.5 cable. For wireless communication, the value applies in open space conditions.

² Only for INCERT compliance.

For detailed information, scan the QR code or follow the link:



Hub Hybrid (2G) / (4G)

[ajax.systems/support/
devices/hub-hybrid-2g](https://ajax.systems/support/devices/hub-hybrid-2g)



Superior Hub Hybrid (4G) (without casing)

[ajax.systems/support/
devices/hub-hybrid-4g-without-casing/](https://ajax.systems/support/devices/hub-hybrid-4g-without-casing/)

 support@ajax.systems

 @AjaxSystemsSupport_Bot

 ajax.systems