



Products ▾

Assemble kit



NVR

More ▾

Tech specs

BASELINE

NVR DC (8-ch)

Network video recorder for 8 channels powered by a low-voltage power supply



Video stream

NVR models

8-channel

With up to 4K resolution (25/30 FPS).

IP cameras

- ONVIF (Profile S/T)
- RTSP

Learn more 

Storage

hard drive with a capacity of up to 16 TB (SATA connectivity, 3.5" size)

HDD is not included. A hard drive with power consumption of up to 7 W can be connected.

Learn more 

Decoding formats

H.265

H.264

Bandwidth

up to 100 Mbit/s

Recommendations

The device's operating voltage is 9–16 V_{DC}.

NVR DC is designed for indoor installation only.

Communication channels

Ethernet

up to 100 Mbit/s

Bluetooth

BLE frequency band: 2.400–2.4835 GHz

To set up an Ethernet connection.

Radio signal power

2.5 mW (with the 100 mW limit)

Key features

Motion detection

NVR DC features built-in software to detect movement in the frame. It is possible to switch between image analysis by NVR DC or camera algorithms in an Ajax app.

In-app video management system

- Video wall that combines images from all connected cameras.
- Event filters.
- Timeline with smooth preview.

Visual verification of Ajax alarms

NVR DC allows for setting up a scenario in which Ajax detectors trigger specific cameras to start recording. The result is immediately delivered to mobile and desktop apps.

Support for ONVIF authorization

Profile S

Profile T (partially)

Ajax cameras and NVRs can be integrated into third-party video management systems (VMS).

Learn more 

Privacy

Access rights distribution for users in mobile apps and for monitoring company operators in PRO Desktop.

Power supply

Without an installed jumper on the PSU board

- 8–16 V_{DC}, up to 4 A
- 8 V_{DC} — turn-on threshold when the voltage rises
- 6.5 V_{DC} — turn-off threshold when the voltage drops

With an installed jumper on the PSU board

- 12.1–16 V_{DC}, up to 4 A
- 12.1 V_{DC} — turn-on threshold when the voltage rises
- 10.35 V_{DC} — turn-off threshold when the voltage drops

Power consumption

up to 24 W

Clock battery

CR2032 battery, 3 V

Only to power the system clock.

Sabotage protection

Tamper alarm

Notifications of an attempt to detach the device from the surface or remove it from the mounting panel.

Learn more 

Enclosure

Dimensions

193 × 193 × 47 mm

Weight

583 g

Without a hard drive.

Operating temperature range


from 0 °C to +40 °C

Operating humidity

up to 75%

Protection class

IP20

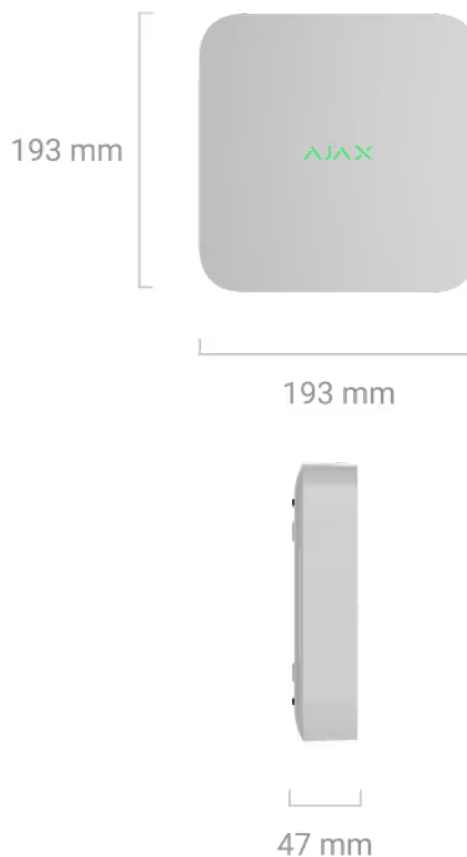

Colors

Black



White



Complete set

NVR DC

SmartBracket mounting panel

Terminal adapter

Ethernet cable

Installation kit

Quick start guide

Certification and compliance with standards



NVR DC (8-ch)



Additional information

Compliance with standards

Learn more >

User manual

Learn more >

Warranty

24 months

[Learn more](#) 

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

Request extra help

 support@ajax.systems

 [@AjaxSystemsSupport_Bot](#)

 [Send a request](#)

 **Trustpilot**



Rating 4.8

4,000,000

people worldwide under Ajax protection

 [Suggest a feature](#)



Products

[Intrusion protection](#)

[Video surveillance](#)

[Fire and life safety](#)

Software

[For users](#)

[Ajax PRO: Tool for Engineers](#)

[Ajax Desktop](#)

[Comfort and automation](#)[All products](#)[Services](#)[System integrations](#)[Ajax Ready products](#)[Fibra wired protocol](#)[Ajax radio protocols](#)[Ajax PRO Desktop](#)[Ajax Translator PRO](#)[Ajax Cloud Signaling](#)[Scenarios](#)

Available on
App Store



Available on
Google Play

Solutions

[Customer stories](#)[Solutions by facility type](#)[Commercial fire detection and alarm system](#)[Wireless Grade 3 solution](#)[Upgrades and retrofits](#)[Why Ajax](#)[How it works](#)

Support

[Manuals and articles](#)[Compliance with standards](#)

Tools

[Ajax device compatibility](#)[Video storage calculator](#)[Video device calculator](#)[Battery life calculator](#)[Radio communication range calculator](#)[Switches and outlets configurator](#)[Fibra power supply calculator](#)[All web tools](#)

Monitoring solutions and integrations

[Intrusion alarm monitoring](#)[Video monitoring and visual alarm verification](#)[Audio alarm verification](#)

Company

[Blog](#)[About us](#)[Press page](#)[Events](#)[Career](#)[Ajax Next](#)[Students at CES 2026](#)

For partners

[For partners](#)[Ajax Academy](#)[Partner Portal](#)

[Reviews and feedback](#)

[!\[\]\(4729e517bc6a7cd81c8025b9646574fb_img.jpg\) România](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#) [Anti-Spam Policy](#)
[End user agreement](#) [Warranty](#)

© 2025 AJAX SYSTEMS CH. All rights reserved