


Tech specs

SurfaceBox [55]

Surface mounting box for one LightSwitch or Outlet device

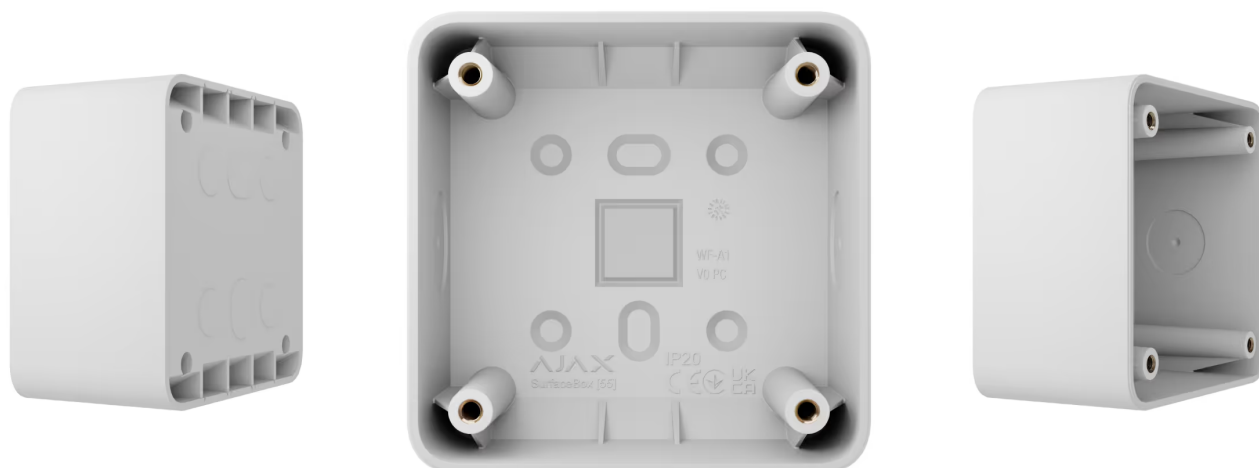

Compatibility

LightSwitch devices

LightSwitch (1-gang) Jeweller >

LightSwitch (2-gang) Jeweller >

LightSwitch (2-way) Jeweller >

LightSwitch (2-gang/2-way) Jeweller >

LightSwitch (Crossover) Jeweller >

LightSwitch (Dimmer) Jeweller >

Outlet devices

Outlet [type E] Jeweller >

Outlet [type F] Jeweller >


Outlet (basic) [type E] >

Outlet (basic) [type F] >

Colors

White

RAL 9003



Key features

Color and shape matching

The SurfaceBox [55] shape smoothly aligns with the LightSwitch touch-sensitive panel and Outlet cover.

Easy installation

Various fixing points to mount SurfaceBox [55] on any surface.

Cable routing

Dedicated spots to route the wires in SurfaceBox [55] from the back or side.

Form factor of the LightSwitch or Outlet device

European type (55)

Recommendations

The device is designed for indoor use only. A professional electrician should install the device.

Enclosure

Dimensions

82.6 × 82.6 × 46.8 mm

Weight

63.5 g


Material

polycarbonate

Operating temperature range

from −10 °C to +40 °C

Operating humidity

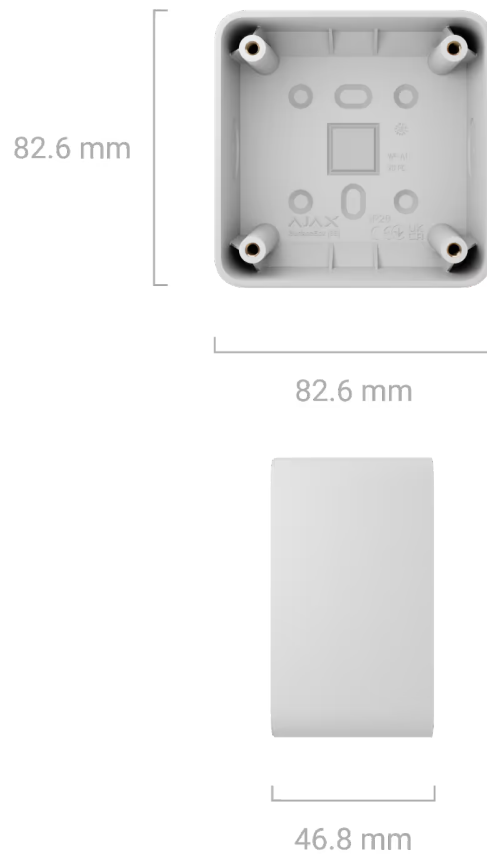

up to 75% with no condensation

Protection class

IP20

Complete set

SurfaceBox [55]

4 screws for LightSwitch or Outlet device mounting

Quick start guide

Certification and compliance with standards



SurfaceBox [55]



Additional information

[Compliance with standards](#)

[User manual](#)

[Learn more](#) [Learn more](#) 

Warranty

24 months

[Learn more](#) 

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

Request extra help

 support@ajax.systems

 [@AjaxSystemsSupport_Bot](#)

 [Send a request](#)

 **Trustpilot**



Rating 4.7

4,000,000

people worldwide under Ajax protection

 [Suggest a feature](#)

[Products](#)[Software](#)

[Intrusion protection](#)

[Video surveillance](#)

[Fire and life safety](#)

[Comfort and automation](#)

[All products](#)

[Services](#)

[System integrations](#)

[Ajax Ready products](#)

[Fibra wired protocol](#)

[Ajax radio protocols](#)

[For users](#)

[Ajax PRO: Tool for Engineers](#)

[Ajax Desktop](#)

[Ajax PRO Desktop](#)

[Ajax Translator PRO](#)

[Ajax Cloud Signaling](#)

[Scenarios](#)



Available on
App Store



Available on
Google Play

Solutions

[Customer stories](#)

[Solutions by facility type](#)

[Commercial fire detection and alarm system](#)

[Upgrades and retrofits](#)

[Why Ajax](#)

[How it works](#)

Support

[Manuals and articles](#)

[Compliance with standards](#)

Tools

[Ajax device compatibility](#)

[Video storage calculator](#)

[Video device calculator](#)

[Battery life calculator](#)

[Radio communication range calculator](#)

[Switches and outlets configurator](#)

[Fibra power supply calculator](#)

[All web tools](#)

Connecting to CMS

[Intrusion alarm monitoring](#)

[Video monitoring and visual alarm verification](#)

[Audio alarm verification](#)

Company

[Blog](#)

[About us](#)

[Press page](#)

[Events](#)

For partners

[For partners](#)

[Ajax Academy](#)

[Partner Portal](#)

[Career](#)

[Ajax Next](#)

[Students at CES 2026](#)

[Reviews and feedback](#)

[!\[\]\(fa6f3af6bfa46c5d4a2d362681095beb_img.jpg\) România](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#) [Anti-Spam Policy](#)

[End user agreement](#) [Warranty](#)

© 2025 AJAX SYSTEMS CH. All rights reserved