

Tech specs

Outlet (LAN)



Ethernet wall outlet with two ports





Components

Core

OutletCore (LAN) [55]



OutletCore (LAN) vertical [55]



Covers

SoloCover (LAN)

Used when the outlet is installed as a separate device.



SideCover (LAN)

Used when the outlet is installed on the right or left side of a device set.




SideCover (LAN) vertical

Used when the outlet is installed on top or bottom of a device set.




CenterCover (LAN)

Used when the outlet is installed between devices in a set. For horizontal installation.



CenterCover (LAN) vertical


Used when the outlet is installed between devices in a set. For vertical installation.




Frames

Frames for two, three, four, and five Ajax outlets and switches in any combination*.


Frame (2 seats)




Frame (3 seats)




Frame (4 seats)

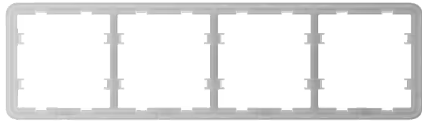

Frame (5 seats)

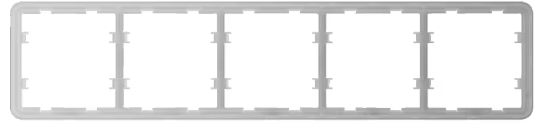

Frame (2 seats) vertical




Frame (3 seats) vertical



Frame (4 seats) vertical

Frame (5 seats) vertical

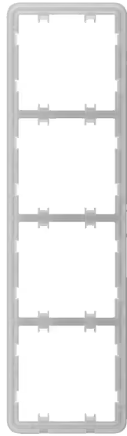

* Combinations that include smart outlets are available only in a horizontal orientation.

Configuration

Single outlet

Outlet (LAN) is installed as a separate device.



Combined outlet

Outlet (LAN) is installed alongside Ajax outlets and/or LightSwitch switches within a Frame.

Assemble your own set of Ajax switches and outlets >



Cover colors

Black

RAL 9005



Graphite

RAL 7024




White

RAL 9003



Ivory

RAL 1013



Fog

RAL 7047

**Oyster**

RAL 9002

**Grey**

RAL 7004



**Olive**

RAL 7044



The RAL colors provide an approximate representation of the actual color. Therefore, slight variations may occur. Please use them only as a reference when selecting a color.

Core colors**Black****White**



Recommendations

The device is designed for indoor use only and must be installed by a professional electrician.

Key features

Ports

2 × CAT.6 Ethernet ports

Support for data transfer speeds up to 1 Gbit/s over a maximum distance of 100 meters.

Operating parameters

Operating temperature range

from $-10\text{ }^{\circ}\text{C}$ to $+40\text{ }^{\circ}\text{C}$

Operating humidity

up to 75% with no condensation


Protection class

IP20

Dimensions



OutletCore (LAN) [55]

$78.3 \times 74.4 \times 37.5\text{ mm}$

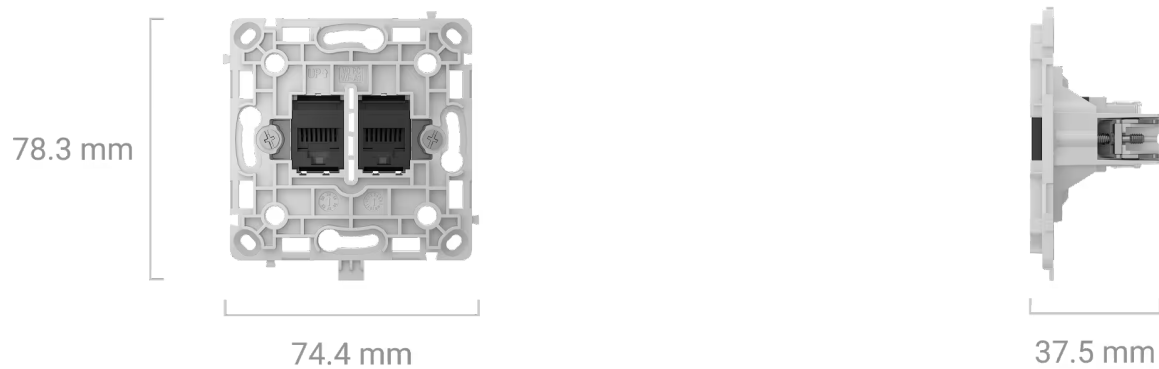



OutletCore (LAN) vertical [55]

74.4 × 75.5 × 37.5 mm

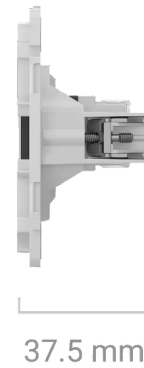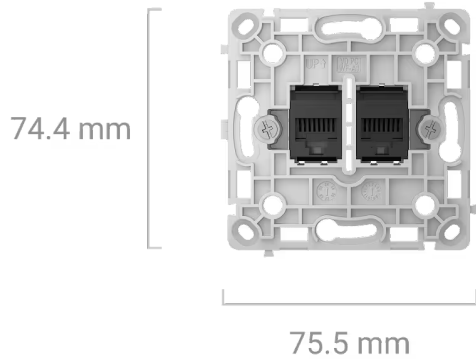

SoloCover (LAN)

82.0 × 82.0 × 9.3 mm

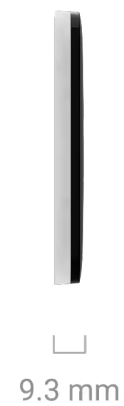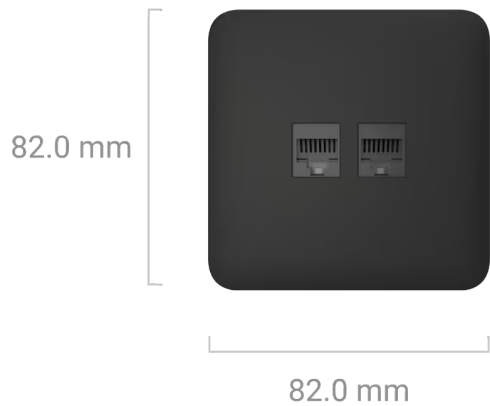


SideCover (LAN)

82.0 × 76.3 × 9.3 mm




SideCover (LAN) vertical

76.3 × 82.0 × 9.3 mm

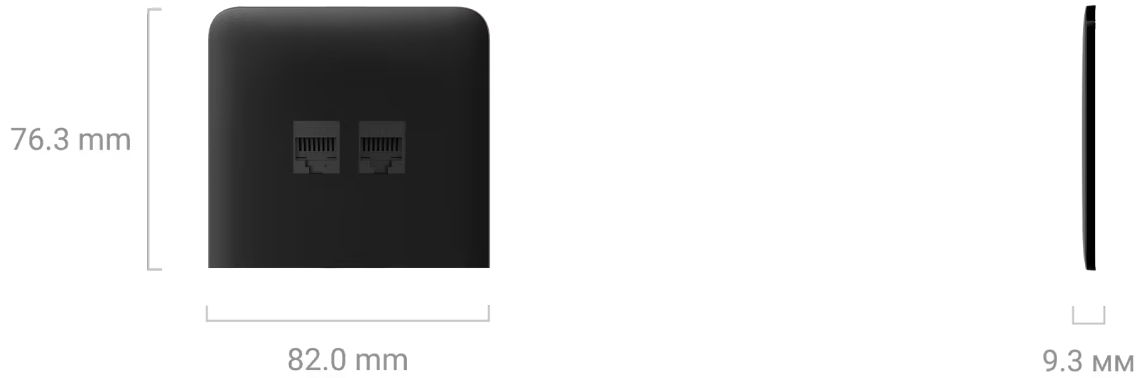


CenterCover (LAN)

82.0 × 70.5 × 9.3 mm

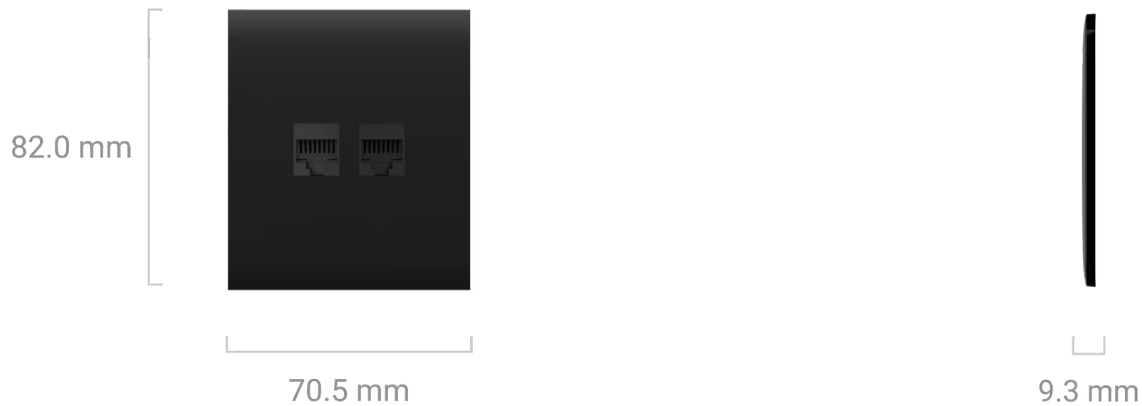


CenterCover (LAN) vertical

70.5 × 82.0 × 9.3 mm

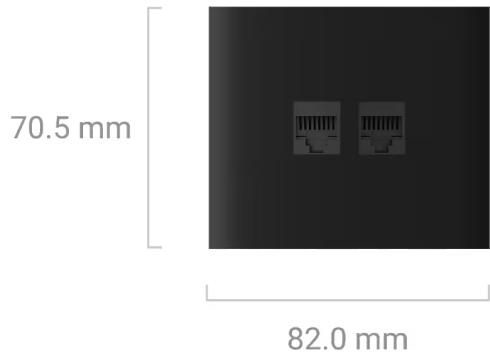


Frames


Frame (2 seats) – 82.8 × 153.5 × 6.3 mm

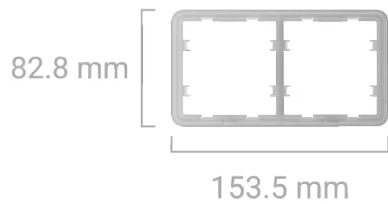


Frame (3 seats) – 82.8 × 224.5 × 6.3 mm

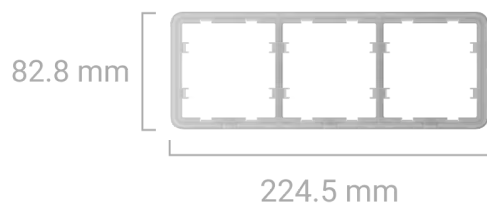

Frame (4 seats) – 82.8 × 295.5 × 6.3 mm

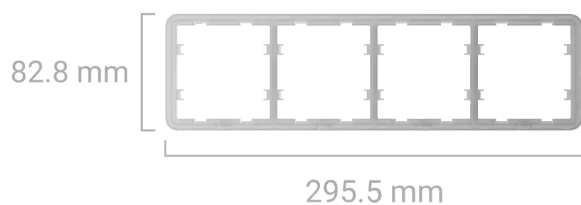

Frame (5 seats) – 82.8 × 366.5 × 6.3 mm

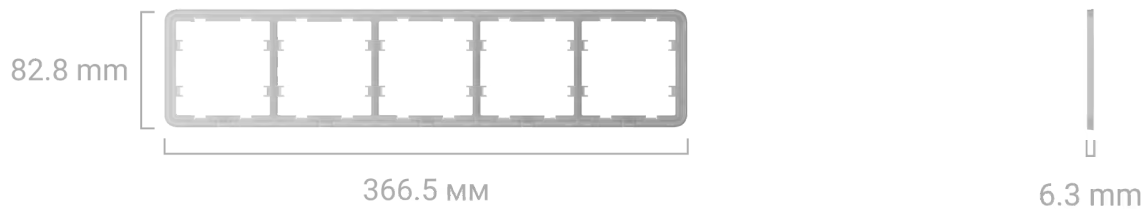


Frame (2 seats) vertical – 153.5 × 82.8 × 6.3 mm




Frame (3 seats) vertical – 224.5 × 82.8 × 6.3 mm



Frame (4 seats) vertical – 295.5 × 82.8 × 6.3 mm



Frame (5 seats) vertical — $366.5 \times 82.8 \times 6.3$ mm

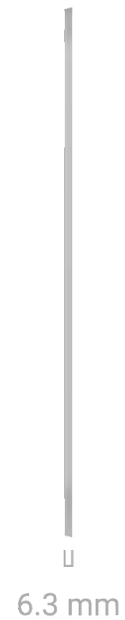

Weight

OutletCore (LAN) [55]

40 g

OutletCore (LAN) vertical [55]

40 g

SoloCover (LAN)

14 g

SideCover (LAN)

12 g

SideCover (LAN) vertical

12 g

CenterCover (LAN)

12 g

CenterCover (LAN) vertical

12 g

Frames

Frame (2 seats) – 16 g

Frame (2 seats) vertical – 16 g

Frame (3 seats) – 22 g

Frame (3 seats) vertical – 22 g

Frame (4 seats) – 28 g

Frame (4 seats) vertical – 28 g

Frame (5 seats) – 34 g

Frame (5 seats) vertical – 34 g

Complete set

Outlet (LAN) is a prefabricated device. All parts are purchased separately.

Assemble your own set of Ajax switches and outlets 

Certification and compliance with standards



Outlet (LAN)



Additional information

Compliance with standards

Learn more >

User manual

Learn more >

Warranty

24 months

Learn more >

Subscribe

Subscribe to our emails about secure life. No spam.

Subscribe

Request extra help

✉ support@ajax.systems

📍 @AjaxSystemsSupport_Bot

💬 Send a request

★ Trustpilot



Rating 4.7

4,000,000

people worldwide under Ajax protection

 [Suggest a feature](#)



Products

[Intrusion protection](#)

[Video surveillance](#)

[Fire and life safety](#)

[Comfort and automation](#)

[All products](#)

[Services](#)

[System integrations](#)

[Ajax Ready products](#)

[Fibra wired protocol](#)

[Ajax radio protocols](#)

Solutions

[Customer stories](#)

[Solutions by facility type](#)

[Commercial fire detection and alarm system](#)

[Upgrades and retrofits](#)

[Why Ajax](#)

[How it works](#)

Software

[For users](#)

[Ajax PRO: Tool for Engineers](#)

[Ajax Desktop](#)

[Ajax PRO Desktop](#)

[Ajax Translator PRO](#)

[Ajax Cloud Signaling](#)

[Scenarios](#)



Available on
App Store



Available on
Google Play

Support

[Manuals and articles](#)

[Compliance with standards](#)

Tools

[Ajax device compatibility](#)

[Video storage calculator](#)

[Video device calculator](#)

[Battery life calculator](#)

[Radio communication range calculator](#)

[Switches and outlets configurator](#)

[Fibra power supply calculator](#)

[All web tools](#)

Connecting to CMS

[Intrusion alarm monitoring](#)

[Video monitoring and visual alarm verification](#)

[Audio alarm verification](#)

Company

[Blog](#)
[About us](#)
[Press page](#)
[Events](#)
[Career](#)
[Ajax Next](#)
[Students at CES 2026](#)
[Reviews and feedback](#)

For partners

[For partners](#)
[Ajax Academy](#)
[Partner Portal](#)

 [România](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#) [Anti-Spam Policy](#)
[End user agreement](#) [Warranty](#)

© 2025 AJAX SYSTEMS CH. All rights reserved