

## DS-3E0508D-O 8-Port Gigabit Plastic Switch



DS-3E0508D-O provides 8x10/100/1000 Mbps Ethernet ports which support line speed forwarding. With simple and mini exquisite body, the switch is plug and play and easy to use, suitable for home, school, dormitory, office, small monitoring and other simple network environments.

- 8 x 10/100/1000 Mbps ethernet ports
- Supports ADI/ADIX.
- Store-and-forward switching
- Supports MAC address auto-learning and aging.
- Simple, compact body design
- Supports desktop and wall-mounting.
- Plug&play, easy to use


▪ **Specification**

Model		DS-3E0508D-O
<b>Network Parameters</b>	Ports	8
	Port Type	10/100/1000 Mbps RJ45 ports
	Forwarding Mode	Store-and-forward switching
	MAC Address Table	4 K
	Switching Capacity	16 Gbps
	Packet Forwarding Rate	11.90 Mpps
<b>General</b>	Dimensions (W × H × D)	124.00 mm × 25.00 mm × 61.00 mm (4.88" × 0.98" × 2.40")
	Shell	ABS
	Net Weight	0.093 kg (0.205 lb)
	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Operating Humidity	5% to 95% (no condensation)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Storage Humidity	5% to 95% (no condensation)
Power Supply	5 V DC, 1 A	


▪ **Available Model**

DS-3E0508D-O

▪ **Typical Application**

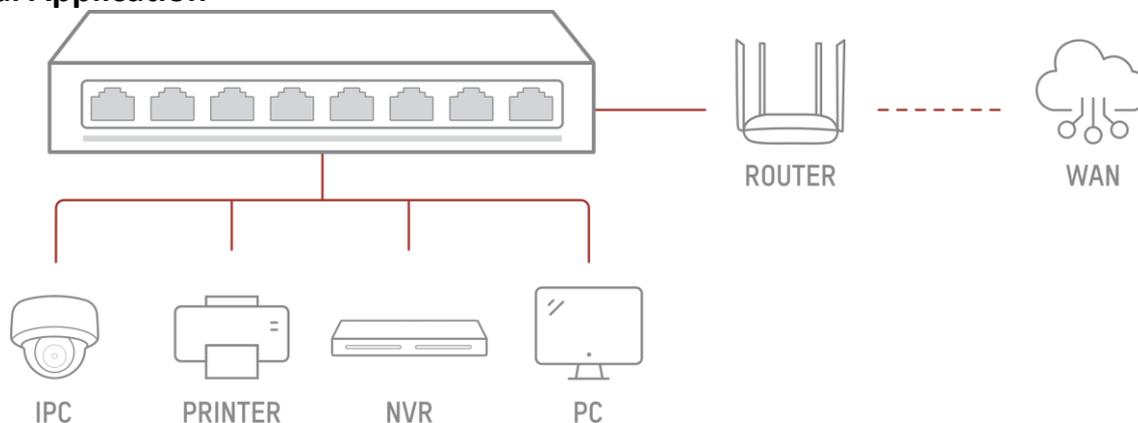


▪ **Physical Interface**

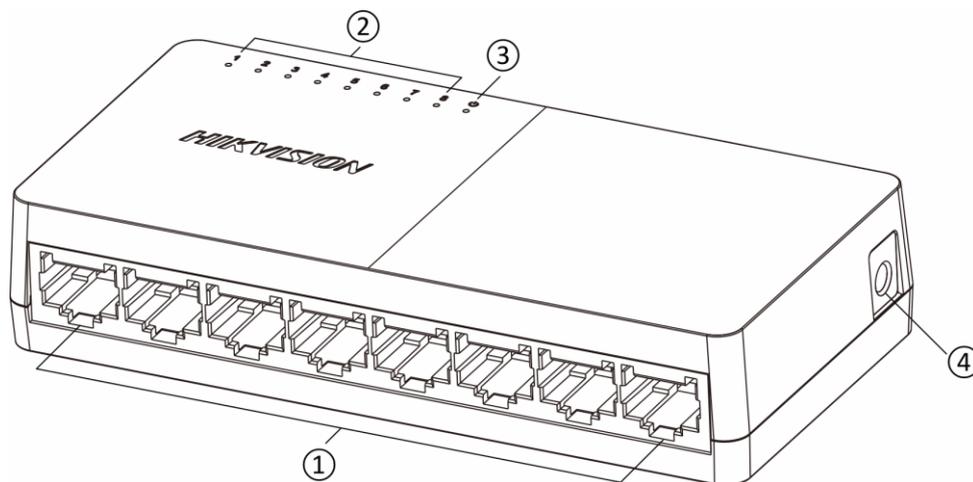

No.	Indicator/Port	Description
①	Gigabit RJ45 Port	Used for connection to another device via a network cable.
②	LINK/ACT Indicator	Indicates the statuses of Gigabit RJ45 ports 1 to 8.
③	PWR Indicator	Indicates the power status of the switch.
④	Power Supply	Use the attached power adapter or power cord to connect the switch to a socket.

▪ Dimension

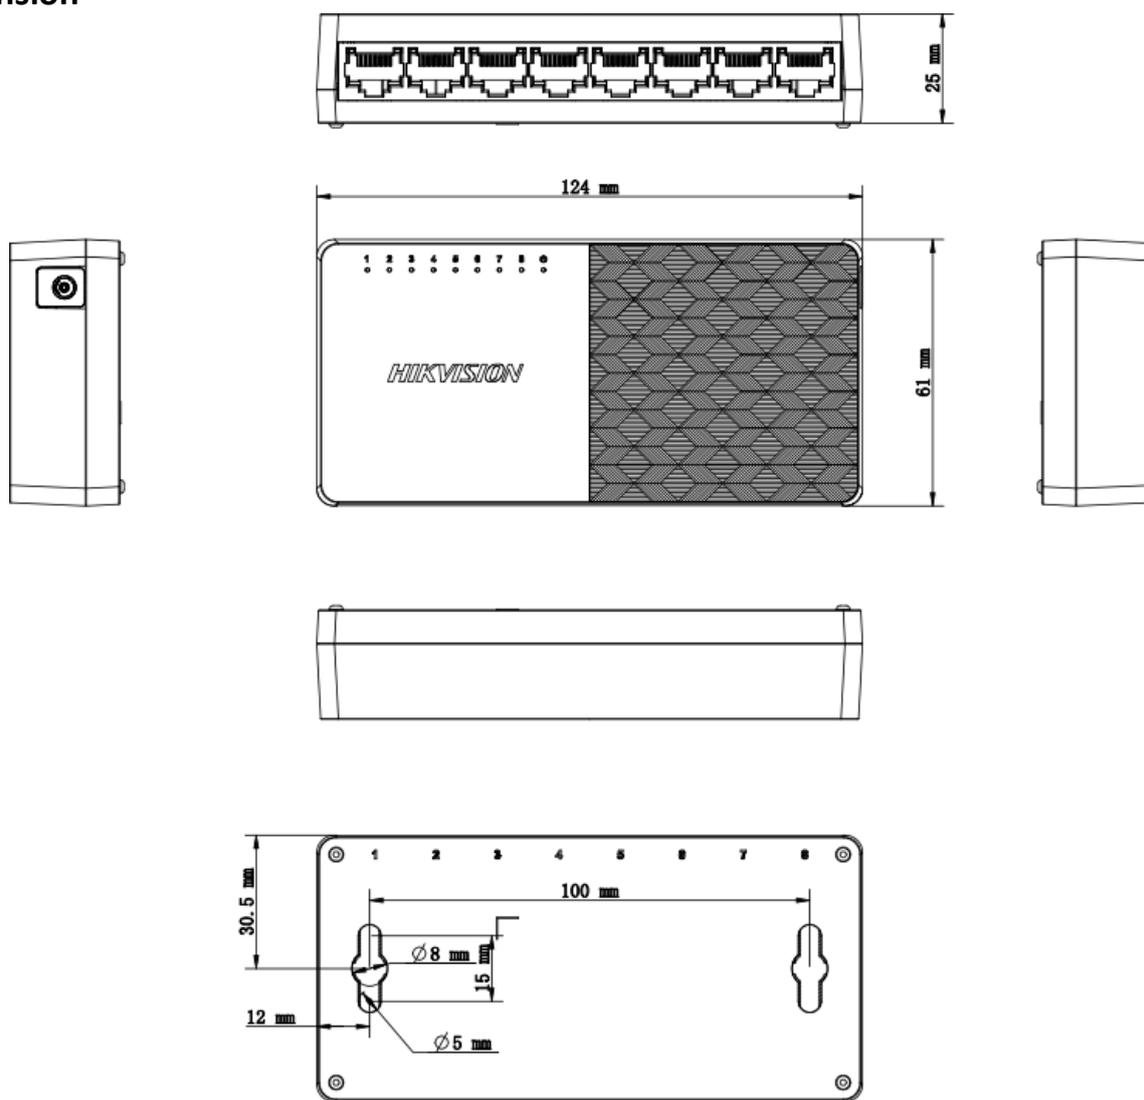

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

