

**Tenda**



**i27**

**AX3000 Wi-Fi 6 Ceiling Access Point**



# i27

## AX3000 Wi-Fi 6 Ceiling Access Point

### Product Description

i27 is designed based on the new Wi-Fi 6 technology. It realizes a bandwidth of 160 MHz and a 5 GHz rate as high as 2.4 Gbps, a rate three times higher than that of ordinary Wi-Fi 5 APs and two times that of ordinary Wi-Fi 6 APs. The application of such new technologies as OFDMA, spatial multiplexing, and MU-MIMO drives the network capacity of a single i27 to 4 times higher. i27 is a perfect choice for such locations as businesses and hotels to deploy high-performance Wi-Fi networks.

## Key Features

---

- Up to 3000 Mbps dual-band data rate
- The new WPA3 encryption mode safeguards your network security
- OFDMA, UL/DL and MU-MIMO technologies provide higher client capacity
- Seamless roaming guarantees no dropped voice or video calls even when moving

## Highlights

---



### 3 Gbps Wi-Fi, 2.5 times higher rate

Both the 2.4 GHz and the 5 GHz radio bands support the new Wi-Fi 6 standard and the concurrent Wi-Fi rate is as high as 2976Mbps, 2.5 times that of the last-generation of AP (AC1200).



### Higher capacity

Supporting OFDMA, SR, and MU-MIMO, 802.11ax greatly improves the system capacity compared with the last generation 802.11ac. With the TWT technology, AP can uniformly schedule the waking and sleep of clients, significantly reducing client conflicts and unnecessary wakeups, and therefore is suitable for high-density crowd scenarios where large numbers of clients are deployed.



### Strong anti-interference capability

Supporting BSS coloring, dynamic CCA threshold and power control, the 802.11ax protocol significantly reduces the channel interference in high-density scenarios and improves the utilization rate of spectrum resources, improving the anti-interference capability compared with 802.11ac.



### low latency

WiFi 6 adopts OFDMA (Orthogonal Frequency Division Multiple Access) technology, which allows more devices to access, with shorter response time and low latency.

# Highlights

---



## Higher security

The Wi-Fi 6 AP supports the new-generation WPA3 Wi-Fi encryption protocol. Under the WPA3 encryption protocol, even the simple password cannot be cracked, greatly enhancing the security of Wi-Fi networks.



## Intelligent roaming protocol


Supporting the intelligent roaming technology based on the 802.11kv protocol, i27 enables wireless clients to automatically connect to AP with a better signal, effectively enhancing the user experience.



## Standard PoE supported, easy installation and deployment

The efficient components and excellent hardware design guarantee the standard 802.3at power supply to 802.11ax dual-band gigabit AP, making installation and deployment simpler.

# Application environment

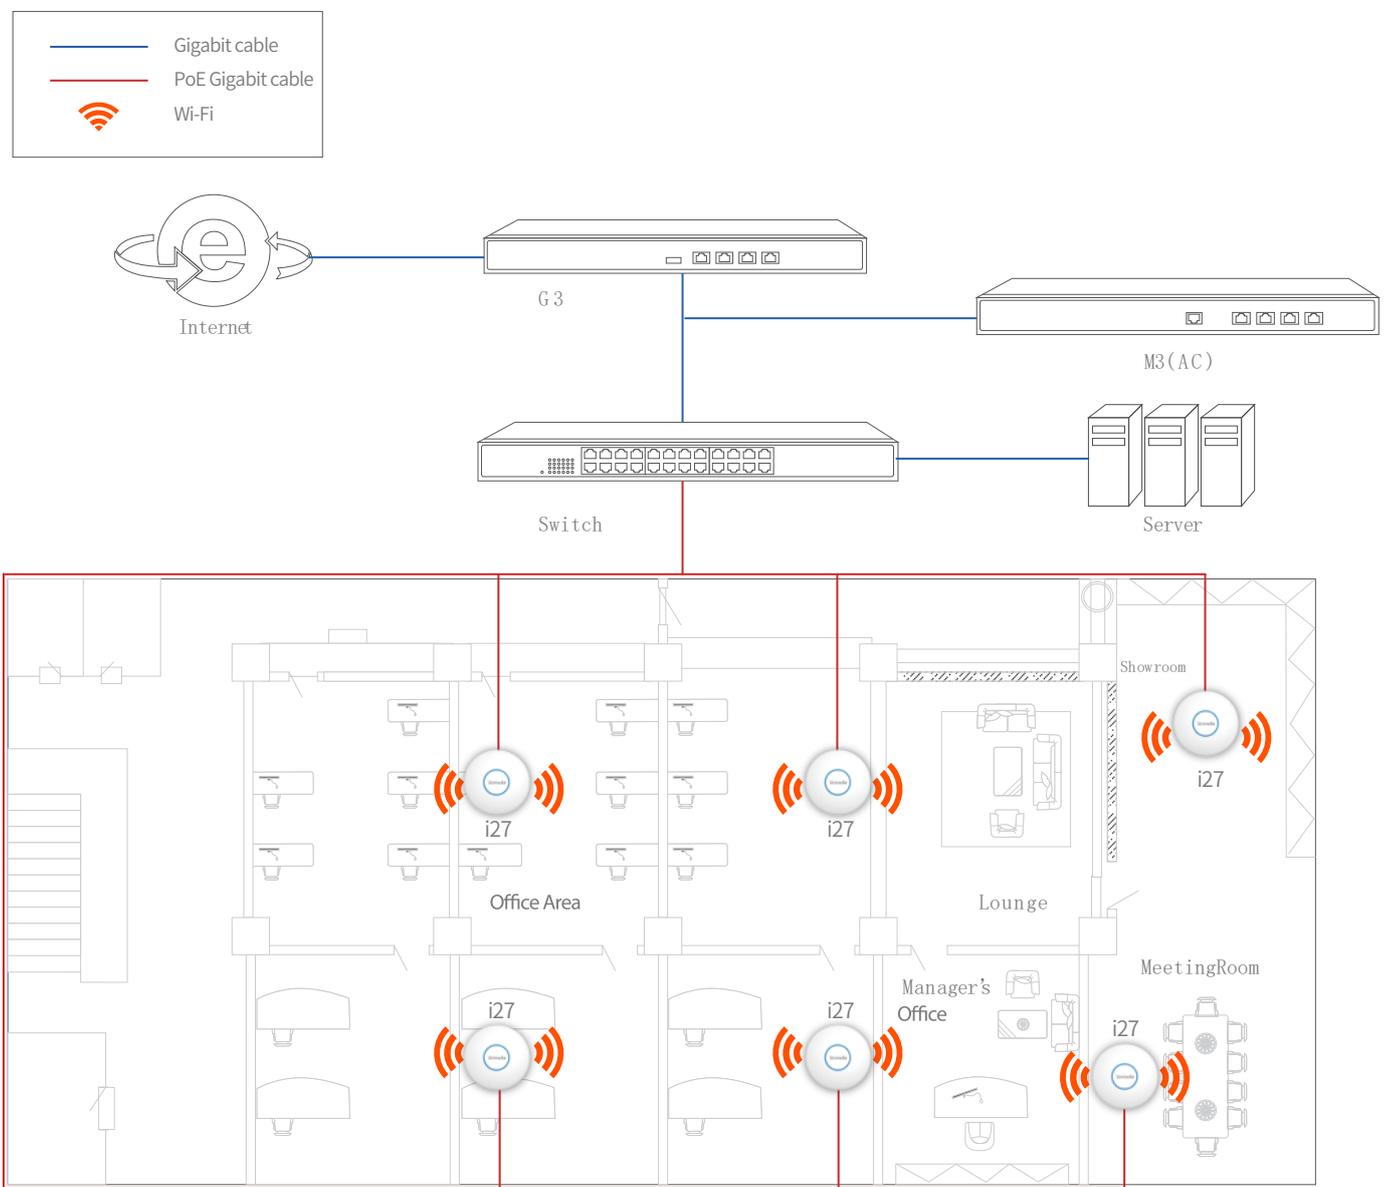

# Technical Specifications

Product Information	
Model	i27
Category	Ceiling
Dimensions	Φ 178 mm * 38 mm
Hardware Specifications	
Frequency band	2.4 GHz, 5 GHz
Wireless standards	IEEE 802.11a/b/g/n/ac/ax
2.4 GHz data rate	1-574 Mbps
5 GHz data rate	6-2402 Mbps
Channel width	20 MHz/40 MHz/80 MHz/160 MHz
MU-MIMO	2X2 MU-MIMO
Ethernet port	One 10/100/1000 Mbps Ethernet Port (PoE)
Button	1*Reset
LED indicator	RGB
Max. power consumption	13.04 W
Power supply standard	IEEE 802.3at PoE
Concurrent clients	254
Antenna gain	2*4 dBi
2.4 GHz Max. output power	27+/-1.5 dBm
5 GHz Max. output power	26+/-1.5 dBm
802.11b RX sensitivity	-99 dBm
2.4 GHz 802.11n (MCS7) RX sensitivity	-78 dBm
5 GHz 802.11a RX sensitivity	-97 dBm
5 GHz 802.11n (MCS7) RX sensitivity	-77 dBm

## Software Specifications

Operating mode	AP、 AP+Client
Hide SSID	Supported
Max. No. of SSID	2.4 GHz: 8 5 GHz: 8
OFDMA	Supported
Beamforming	Supported
TWT	Supported
Fast roaming	Supported
802.11 k/v	Supported
WEP	Supported
WPA-PSK	AES/TKIP
WPA2-PSK	AES/TKIP
WPA3-ASE	AES
WPA	Supported
WPA2	Supported
Access control	MAC address-based
Adjustable power transmit	Supported
Frequency analysis	Supported
AP isolation	Supported
Connected clients control	Supported
RSSI threshold	Supported
VLAN tagging for SSID	Supported
LED indicator control	Supported
Diagnostics tool	Ping, Traceroute
Scheduled reboot	Supported
Reboot at specified interval	Supported

## Software Specifications

System logs	Supported
Firmware upgrade	Supported
Reboot	Supported
Reset	Supported
Backup configuration	Supported
Restore configuration	Supported

## Operating Environment

Default login IP address	192.168.0.254
Default user name	admin
Default password	admin
Operating temperature	-10 °C - 45 °C
Operating humidity	(10% - 90%) RH, non-condensing
Storage temperature	-30 °C - 70 °C
Storage humidity	(10% - 90%) RH, non-condensing

## **SHENZHEN TENDA TECHNOLOGY CO.,LTD.**

Tenda Technology Bldg.Int'l E-City,  
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn

Tel:+86-755-2765 7098

Fax:+86-755-2765 7178

PC:518055

