


## Addressable Input Module

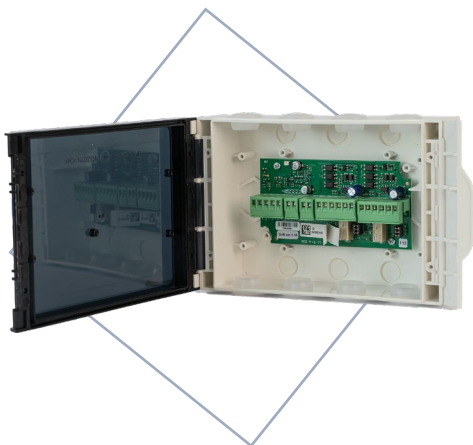

- IP 65 Protection
- Transparent lid
- Easy mounting

SensoIRIS MIO40 IP65 is an programmable input module, designed for application in addressable fire alarm systems, supporting TTE communication protocol. The module is mounted in a separate plastic box suitable for wall mounting with IP65 protection and possible for outdoor installations. The module monitors 4 analogue input signals, which could be programmed to trigger different events in the system. SensoIRIS MIO40 IP65 is powered by the fire alarm panel and can be controlled via the communication protocol.

## Features

- IP 65 Protection
- 4 programmable inputs
- Build-in isolator
- Enclosure box
- PC material
- Transparent lid for module status reading
- More room for cables inside the box

## Technical Specifications

Operating Voltage Range	16 - 32VDC
Consumption, stand-by mode	300µA@27VDC
Nom. current consumption	330µA@27VDC
Outputs, electrical characteristics (max.)	DC 30V/1A; AC 125V/0.5A
Current consumption with 1 LED on	4mA
Current consumption with 2 LEDs on	7mA
Wire Gauge for terminals	0.4mm <sup>2</sup> - 2.0mm <sup>2</sup>
Operating temperature	-35°C to +60°C
Relative humidity resistance	(93 ± 3)% @ 40°C

Last update: 02.2025